

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE FOR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT

USED ON

MODEL

ASS'Y. NO.

DATE


2-18-63

RR-116

D

STANDARD RESISTANCE VALUES (OHMS)


	MFR		MFR		MFR		MFR
1	A, B	100	A, B	1,200	A, B	8,000	A, B
1.5	A, B	120	A	1,400	A	9,000	A, B
2	A, B	150	A, B	1,500	A, B	10,000	A, B
3	A, B	200	A, B	1,800	A	180	B
4	A, B	220	A	2,000	A, B	140	B
5	A, B	250	A, B	2,200	A, B		
7.5	A, B	300	A, B	2,800	A		
10	A, B	350	A, B	3,000	A, B		
12	A, B	400	A, B	3,300	A		
15	A, B	500	A, B	3,500	A, B		
20	A, B	600	A, B	3,900	A		
25	A, B	700	A, B	4,000	A, B		
30	A, B	750	A, B	4,500	A, B		
35	A, B	800	A, B	5,000	A, B		
40	A, B	900	A, B	6,000	A, B		
50	A, B	1,000	A, B	7,000	A, B		
75	A, B	1,100	A, B	7,500	A, B		

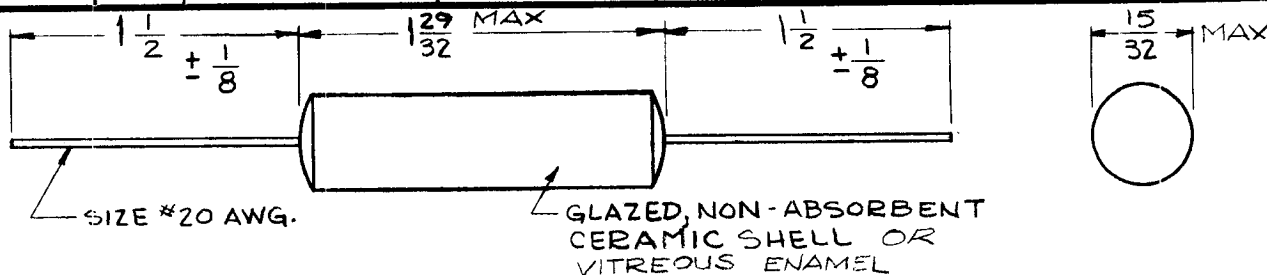

AVAILABLE FROM 1 TO 10,000 OHMS AS SHOWN IN CHART. TOLERANCE $\pm 5\%$.

NOTE: USE ONLY WHERE SPECIAL LOW INDUCTANCE UNIT IS NECESSARY.

T M C PART NUMBER TO BE IN THE FOLLOWING FORM:

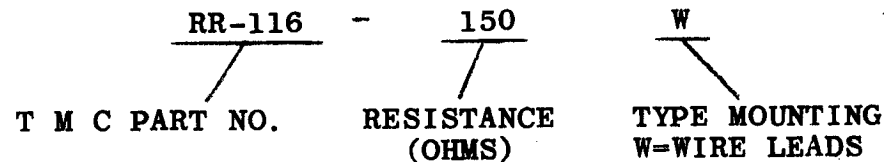

STANDARD DRAWING

D	MFR B WAS S401-501	11/19/71	20430	W	CP	CP	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL	
C	REVISED & UPDATED	6-23-69	19492	GE	LA	EPH				THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
B	175 ADDED TO STAN. RES. VAL. (OHMS) CHART	8-3-65	14511	WV	JKS	MVA			STOCK SIZE	RESISTOR, FIXED, W. W.		
A	REDRAWN & REVISED	2-18-63	8282	WV	JKS	MVA			MATERIAL	10 WATTS (NON-INDUCTIVE)		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE MFR(A) S401-49 (TYPE 457E) MFR(B) S401-378 (TYPE T-10)									 DRAWN CHECKED FINAL APPROVAL	
DECIMALS .X \pm .05 .XX \pm .01 .XXX \pm .005	TOLERANCES	FRACTIONS \pm 1/64 ANGLES \pm 0° 30'	CODE									
									FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	
											RR-116 D	