REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	RR 117	G

STANDARD DRAWING

CONTACT BANDS - FIRED-ON SILVER 7/16 ±, 12.5 WIRE

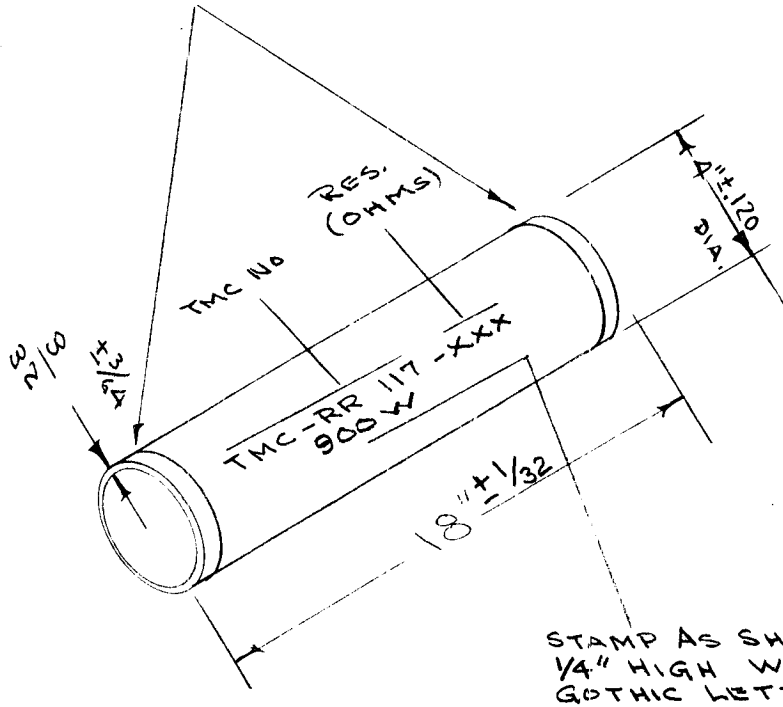

INCLUDES OUT OF ROUND

CORNING NO.	RESIS (OHMS)
	320
	140
	600
	100

TYPE DESIGNATION TO BE IN FOLLOWING FOR

RR 117 - 320

TMC NO — RESIS. (OHMS)

STAMP AS SHOWN 1/4" HIGH WHITE GOTHIC LETTERING

NOTE: RESISTANCE TOL ± 10%

NO LONGER AVALIABLE
REPLACED BY RR 142--

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
H		NOTE: NO LONGER AVAL ADD	4-18-90		CDL		
G		TOL ADDED TO DIM DIM. FOR REF DELETED	10-2-64	12503	JF		
F	1	ON CHART (OHMS), 100 ADDED	8.26.64	12223	WB		
E	1	600 ADDED TO RESIS (OHMS)	2-7-61	4105	WAF		
D	1	RES. TOL ADDED	7/16/60	4			
C	1	WATTAGE STAMPING ADDED	10/21/57	3			
B	1	900 W was 800W	10/16/57	2			
A	1	TYPE DESIGNATION ADDED	1/7/57	1			

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

RESISTOR, FIXED

900 WATTS

STOCK SIZE	MATERIAL	TYPE & TEMPER	HEAT TREAT. SPEC.	FINISH & SPEC. NO.

DRAWN	CHECKED	FINAL APPROVAL
CDL 11/14/85		A.J.J

ELEC. DES. APP.	MECH. DES. APP.	RR 117	G
ARB			

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REM VE ALL BURRS AND SHARP EDGES

FORM - 108 - A