


REQ. PER UNIT	MODEL	USED ON
		RR-121
	ASSY. NO.	DATE

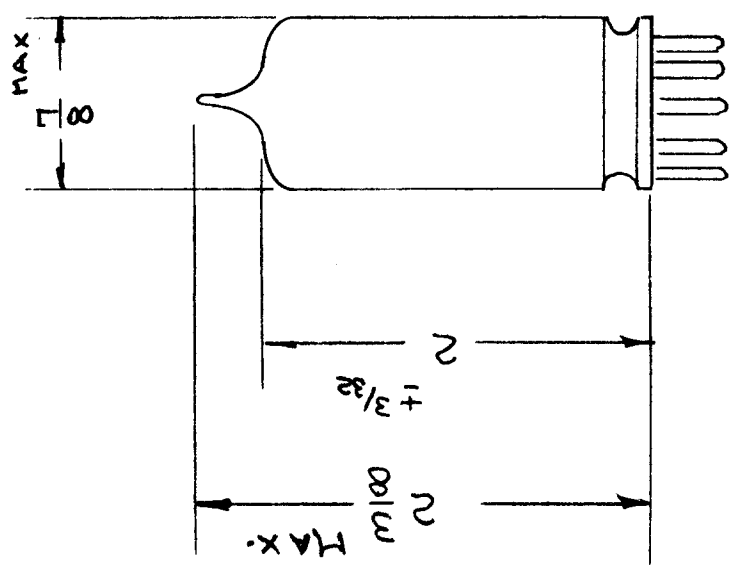

Supply Voltage Variation 10.5 to 12.0 V.  
 Desired on Tubes 6.2 to 6.5 V.  
 Required on Amperite 4.3 to 8.3 V.  
 Current .49 to .55 A.  
 Bulb T6-4  
 Base 9 Pin Noval  
 Base Wiring Pins 2-7

DIMENSIONS FOR REF ONLY

REQ. ITEM		PART NO.		DESCRIPTION		SYMBOL	
				THE TECHNICAL MATERIEL CORP.			
				MAMARONECK. NEW YORK			
				TUBE, BALLAST			
TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED	
				H.D. 7/47		A.J.J.	
FINISH & SPEC. NO.				ELEC. DES. APP.		MECH. DES. APP.	
				M.P.		RR-121	

REF: AMPERITE COMPANY, INC. 5274

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

TOLERANCES

DEC. DIM. ±  
 FRAC. DIM. ±  
 ANGULAR DIM. ±