


# STANDARD DRAWING

UNIT: M DEL ASSY. NO. DATE

RW-109

TMC NO.	RES. OHMS	CURRENT M.A.	TMC NO	RES. OHMS	CURRENT M.A.
RW-109-1	1	3160	RW-109-28	2,000	70
-2	3	1825	-29	2,500	63
-3	5	1415	-30	3,000	58
-4	10	1000	-31	4,000	50
-5	15	815	-32	5,000	45
-6	25	630	-33	7,500	36
-7	50	450	-34	10,000	32
-8	75	365	-35	12,500	28
-9	100	315	-36	15,000	25.5
-10	125	283	-37	20,000	22
-11	150	258	-38	25,000	20
-12	175	239	-39	30,000	18
-13	200	224	-40	35,000	17
-14	250	200	-41	40,000	16
-15	300	182	-42	45,000	15
-16	350	169	-43	50,000	14
-17	400	158	-44	3,500	53
-18	450	149	-45	6,000	41
-19	500	142	-46	30	577
-20	600	129	-47	4,500	47
-21	750	115	-48	7.5	1.150
-22	800	112	-49	700	120
-23	900	105	-50	2	2235
-24	1,000	100	-51		
-25	1,250	89	-52		
-26	1,500	81	-53		
-27	1,750	75	-54		

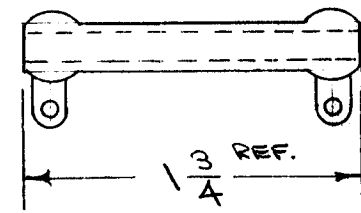

RESISTOR FURNISHED WITHOUT MOUNTING BRACKETS. TERMINALS SHALL BE HOT TIN DIPPED

5401-501  
5401-32(10F)

REQ. ITEM	PART NO.	DESCRIPTION	SYMB L
	#	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	STOCK SIZE	RESISTOR, FIXED, W.W.	
	#	10 WATTS	
	MATERIAL		
	#	DD. 8-3-55	
	TYPE & TEMPER	DRAWN	
	HEAT TREAT. SPEC.	CHECKED	
	FINISH & SPEC. NO.	ELEC. DES. APP.	
		MECH. DES. APP.	

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
G		ADDED: 5401-501-32 DELETED: REF WARD L.	7/7/69	#	GE	JDe	JDe
F		RW109-50 ADDED	2-6-69	19199	GE	JDe	FB JDe

DEC. DIM. ±	MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES
FRAC. DIM. ±	
ANGULAR DIM. ±	