


TMC NO.	DIM. A	DIM. B	USED ON MODEL
RY-123-1	1-1/4	3-1/4	A-1504
RY-123-2	11/16	3-5/16	CSS-1A
RY-123-3	3/4	2-1/8	CSS-1A
RY-123-4	3/4	1-3/4	CSS-1A
RY-123-5	1/2	3/4	GPR-92
RY-123-6	5/8	3/4	GPT-200K

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE

RY-123 C

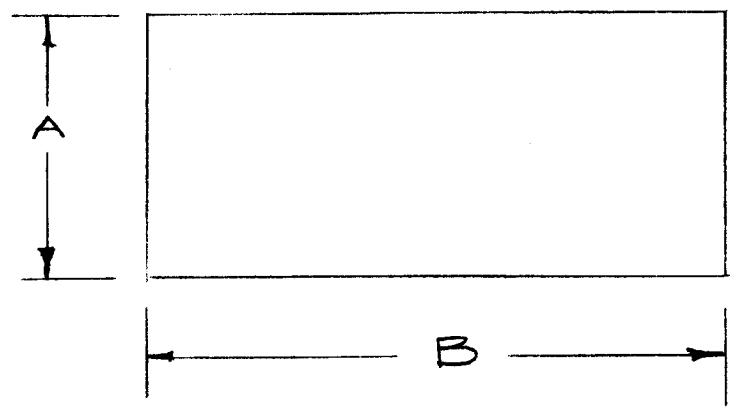

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL		
C	3	ON CHART ADDED RY-123-6	7-2-63	9423									
	2	MATERIAL WAS RUBBER FINISH NAME											
	1	MATERIAL WAS "SHEET RUBBER"											
B	1	RY-123-5 ADDED	11-5-62	7617					1/16" THK.	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK			
A	1	RY-123-2,3,4 ADDED	2-15-62	6237					NEOPRENE	RUBBER STRIP, SOLID, 1/16" THK			
TOLERANCES								DURO 50 TO 60		6/28/58			
SCALE: $\pm$								TYPE & TEMPER		DRAWN		CHECKED	
DEC. DIM. $\pm$								HEAT TREAT. SPEC.		ELEC. DES. APP.		MECH. DES. APP.	
FRAC. DIM. $\pm$ 1/64								BLACK		RY-123		C	
ANGULAR DIM. $\pm$								FINISH & SPEC. NO.					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES													