

TMC SPECIFICATION

NO. S1132

REV:














COMPILED: *WHD*

CHECKED: *N. McLean*


APPD: *[Signature]*

SHEET 1 OF 2

TITLE: WIRING SPEC (LSCA-1)

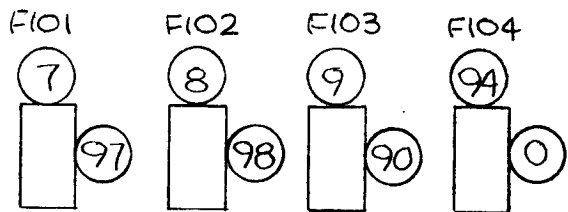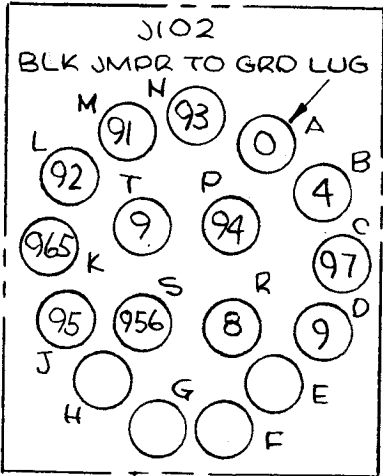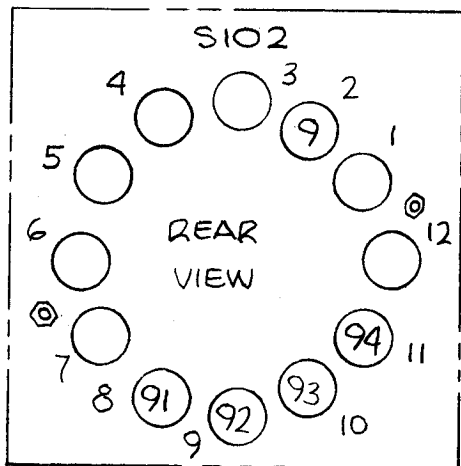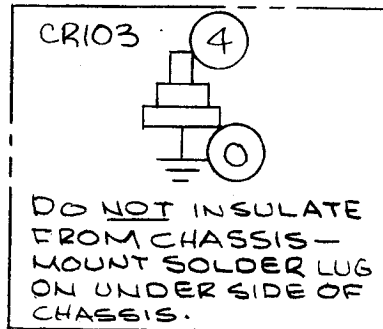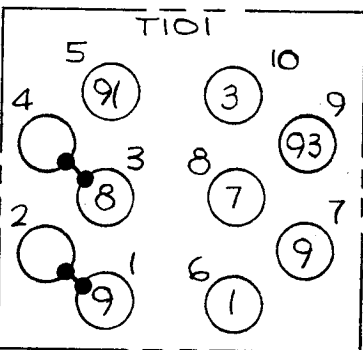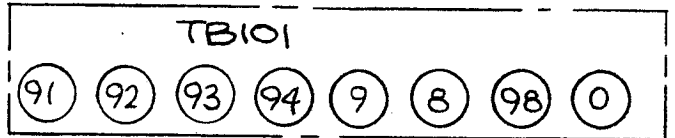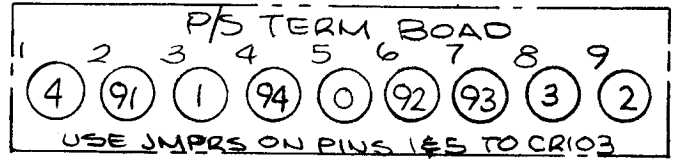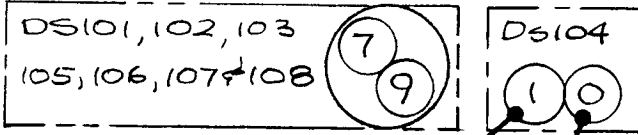

NOTE ~
USE CA1248 FOR REF

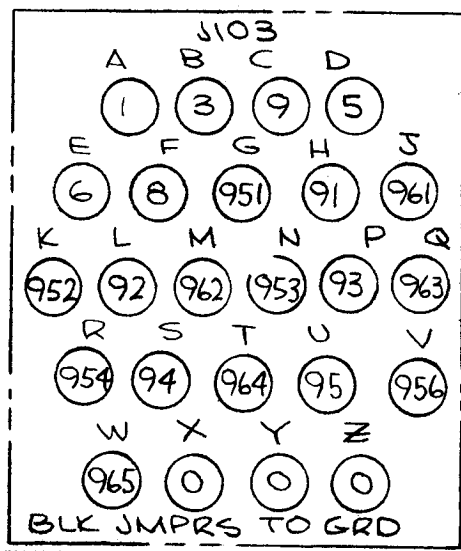

22	7	98	Z
21		92	Y
20	91	8	X
19	94	7	W
18	93	6	V
17	961		U
16	91		T
15	951	7	S
14	91		R
13	962	9	P
12	92	5	N
11	952	2	M
10	92	93	L
9	963	7	K
8	953	9	J
7	4	94	H
6	93	3	F
5	964		E
4	954	7	D
3	94	97	C
2	8	1	B
1	0	7	A

A4410

TMC SPECIFICATION

NO. S 1132

REV:

COMPILED: *WHD*


CHECKED: *W. Nelson*

APPD:

SHEET 2 OF 2

TITLE: WIRING SPEC (LSCA-1)

S103

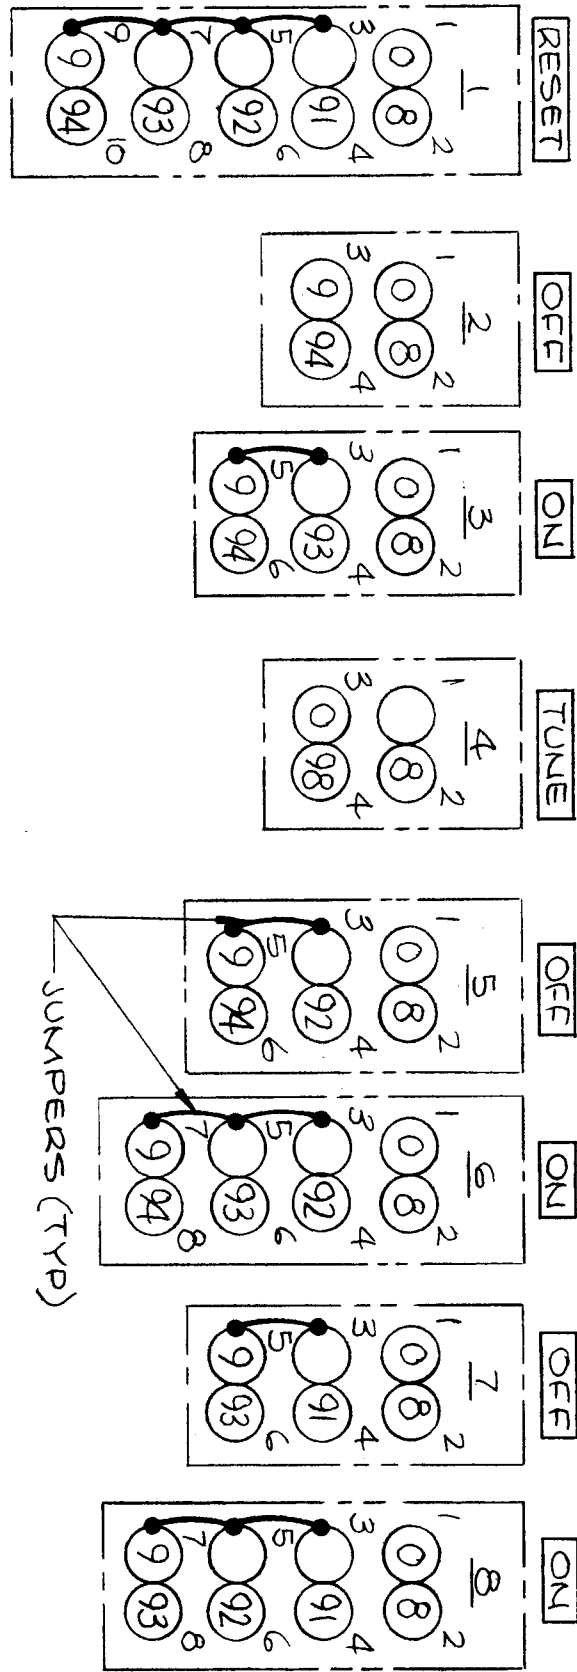

NOTE: USE CA1249 FOR REF

8 — DENOTES PIN NO
 93 — NUMBERS WITHIN
 CIRCLE DENOTES
 WIRE COLOR
 EX: 93
 WHITE — ORANGE

