

REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
XI	Ø	WEIGHT CHART ADDED	7-1-65	---	JC	
		ORIGINAL RELEASE FOR PRODUCTION	8/23/69		CU	


- NOTES
1. FINISH: (.690) PHOSPHATE TREATED PER MIL-C-490 GRADE I (BONDERITE OR EQUIVALENT) AFTER WHICH SURFACE SHALL BE PRIMED WITH ZINC CHROMATE PRIMER TYPE I IN ACCORDANCE WITH THE LATEST VERSION OF MIL-P-6889 AND FINISHED WITH LIGHT GRAY ENAMEL PER MIL-E-15090 B CLASS 2.
 2. MAX. RADIAL TRAVEL UNDER SHOCK = 1/4
 3. MAX. DEFLECTION IN VERTICAL DIRECTION AFTER SHOCK = 1/4
 4. NATURAL FREQUENCY IS WITHIN RANGE OF 9.5 TO 11.5 CPS WHEN LOAD PER BARRYMOUNT IS WITHIN RANGE SPECIFIED.

MFG PT. NO.	MOUNT LOAD RATINGS			
	I	II	III	IV
X20371	150# - 190#	105# - 135#		

* MFG. NO. SUPPLIED AS SPARE PARTS
 5. MANUFACTURED IN ACCORDANCE WITH MIL SPECS.: MIL-M-17185, MIL-E-16400.

MARK TMC PT. NO. W/LATEST REV. LETTER AS PER TMC SPEC. 3-727, LOCATED AS SHOWN.

5/8-11 UNC-28 (INSTALLATION SCREW LENGTH 3/4 MAX.) FROM TOP SURFACE OF CHANNEL ASSY.

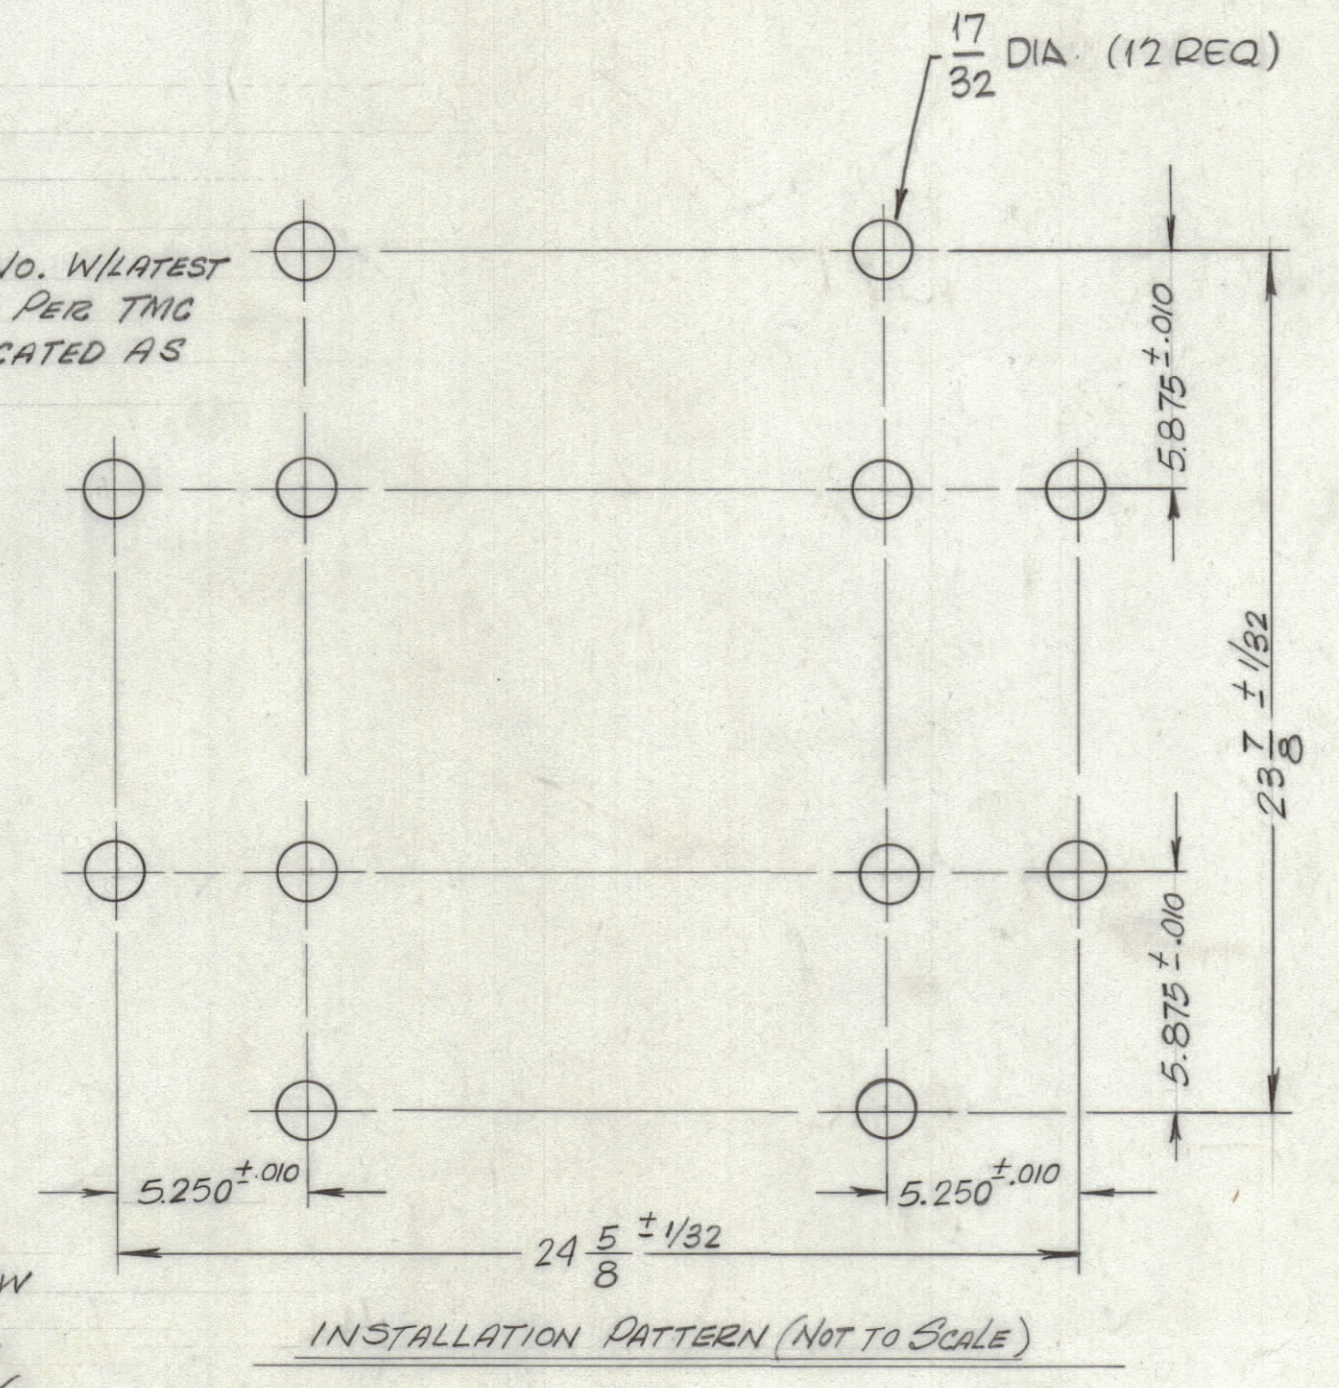

QTY./UNIT	MODEL USED ON	ASBY. NO.
+	C	S401-16B (20371-1)

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
LIST OF MATERIAL				
MATERIAL				
FINISH				
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
TITLE				
BASE, MOUNTING, SHOCK				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN	DATE	FINAL APPROVAL
DECIMALS ± .05		H. AUSTIN	6-25-65	JM
FRACTIONS ± 1/64		CHECKED	DATE	
ANGLES ± 0° 30'		YCB	6-25-65	
TOLERANCES		ELECT. DES.	DATE	
		MECH. DES.	DATE	
				REV. LTR.

NOTES