| REQ. PER UNIT | USED ON | | |
|---|---|---|---|
| | MODEL | ASS'Y. NO. | DATE |
| 25 | VOX | A-584 | 8-25-58 |
| 25 | PMO | A-584 | 8-26-58 |
| 25 | RTF | A-584 | 8-26-58 |

SL-101

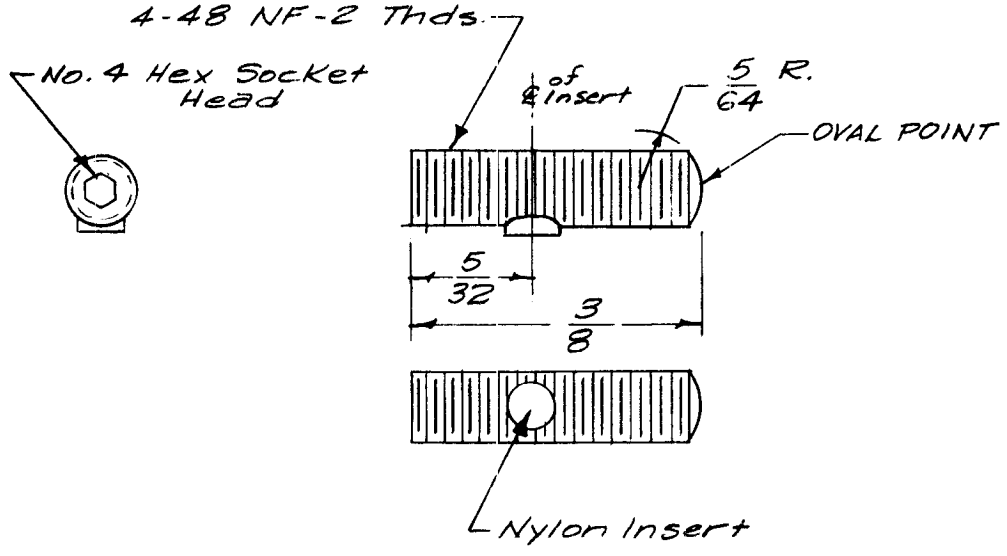


Ref - Standard Press Steel

| ISSUE | ITEM | CHANGED FROM | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. |
|---|---|---|---|---|---|---|---|
| | | USED IN PLACE OF SL-100 | | | | | |

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ± 1/64
ANGULAR DIM. ±

SCALE: 4X

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| | | | | |

STOCK SIZE: Steel

MATERIAL:

TYPE & TEMPER | HEAT TREAT. SPEC.:

FINISH & SPEC. NO.:

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

SET SCREW, LOCKING

| DRAWN | CHECKED | FINAL APPR VAL |
|---|---|---|
| 8/25/58 | | |
| ELEC. DES. APP. | MECH. DES. APP. | SL-101 |

FORM 108-A