


# OAK TYPE (H, HC, DH, DHC, QH, GDH, QHC, ODHC, ) SWITCH

CIRCLE TYPE DESIRED


CUSTOMER'S PART NO. SW-171

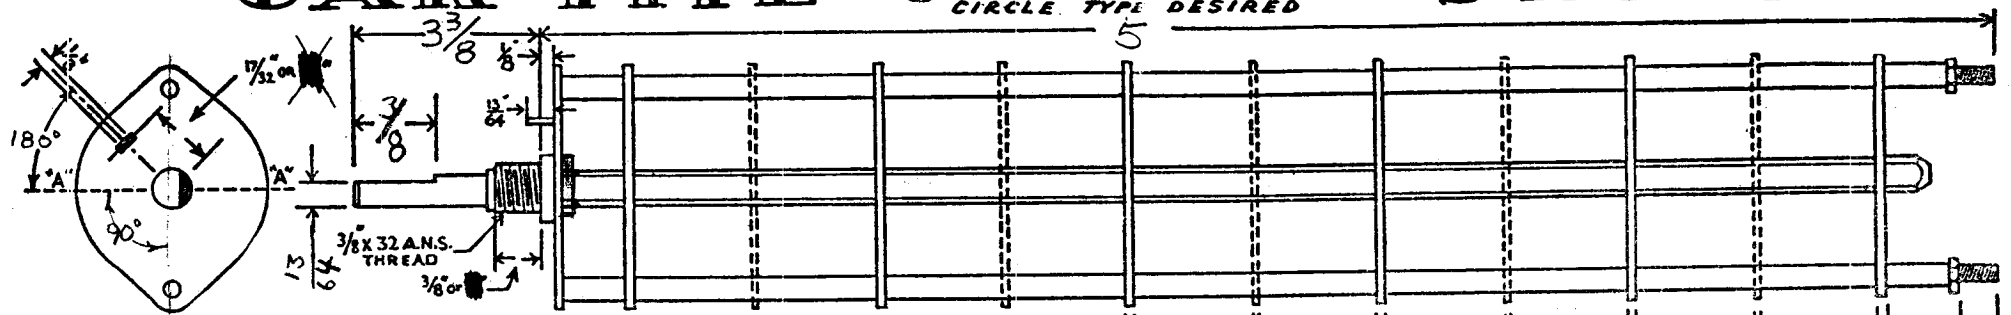


DRAW IN FLAT ON ABOVE SHAFT IN EXTREME COUNTER CLOCKWISE POSITION AND SHOW ANGLE IN REFERENCE TO LINE "A-A"

FRONT AND REAR OF SECTIONS VIEWED FROM FRONT OR KNOB END OF SWITCH IN EXTREME COUNTER-CLOCKWISE POSITION

TOTAL NO. OF SECTIONS 2  
 NO. OF POSITIONS NO DETENT

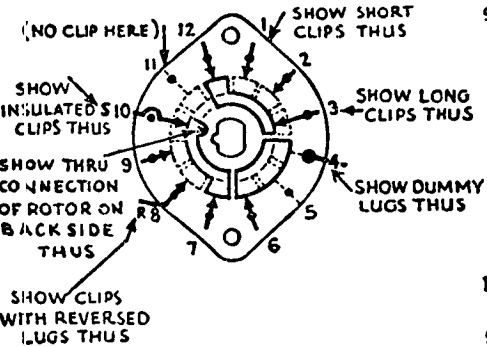

OUTLINE ROTOR BLADES AS ABOVE IN EXTREME COUNTER-CLOCKWISE (LEFT) POSITION

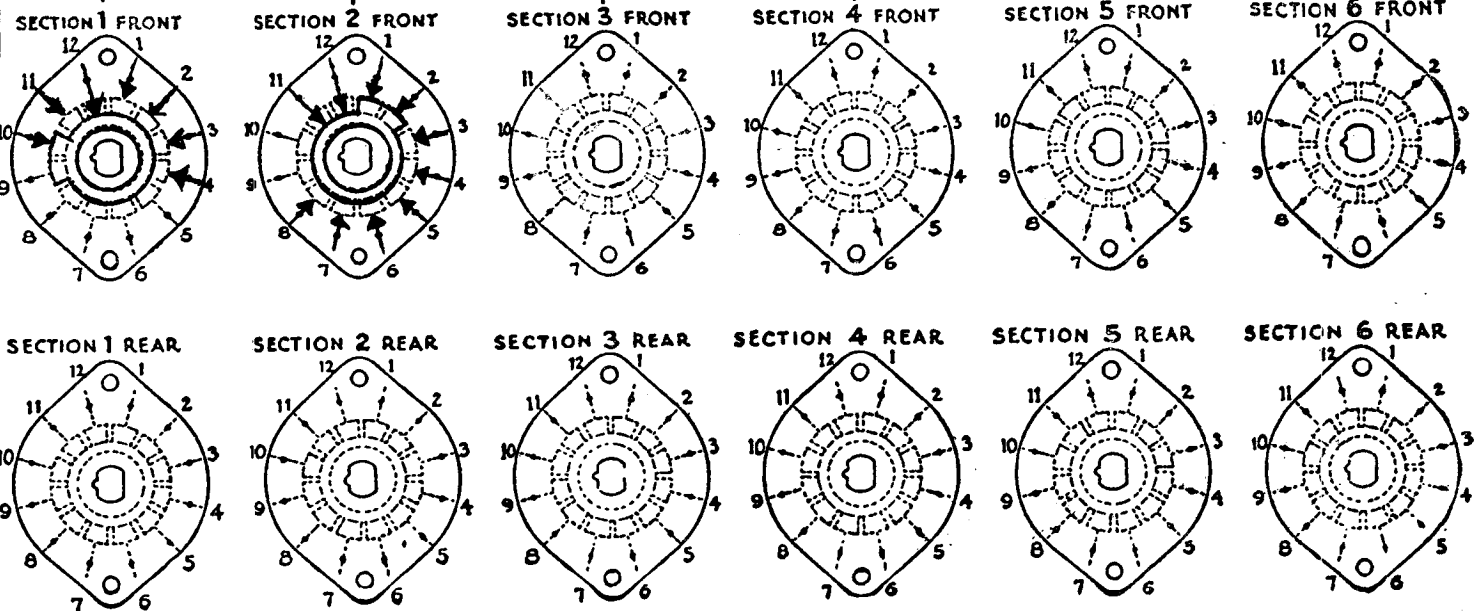

FILL IN ALL DIMENSIONS INDICATED ABOVE AND CHECK ALL SPECIFICATIONS BELOW. REFER TO OAK ENGINEERING DATA SHEETS FOR STANDARD DIMENSIONS OF TYPE DESIRED AND FOR SPECIMEN OF THIS LAYOUT SHEET. TO OBTAIN MOST ECONOMICAL UNITS AND SHORTEST DELIVERY DATES PLEASE ADHERE TO THE STANDARDS AS CLOSELY AS POSSIBLE.

**SPECIFICATIONS**

SHORTING TYPE CONTACTS  NON-SHORTING  IF NOT SPECIFIED SHORTING TYPE WILL BE SUPPLIED.  
 INSULATION: BAKELITE ; CERAMIC  SPECIFY IMPREGNATION IF REQUIRED  
 FINISH REQUIREMENTS: COMMERCIAL ; ARMY ; NAVY ; SALT TEST (IF ANY GIVE DETAILS) \_\_\_\_\_  
 CONTACTS AND ROTORS: SILVER PLATED BRASS ; SOLID SILVER ALLOY ; IF NOT SPECIFIED SILVER PLATED BRASS WILL BE SUPPLIED.  
 MOUNTING HARDWARE: SUPPLY \_\_\_\_\_ 3/8" - 32 NUTS \_\_\_\_\_ ACROSS FLATS; MATERIAL \_\_\_\_\_ PLATING \_\_\_\_\_  
 \_\_\_\_\_ 3/8" INTERNAL TOOTH LOCKWASHER; MATERIAL \_\_\_\_\_ PLATING \_\_\_\_\_  
 STAMP PART NUMBER SW 171 ON FRONT PLATE, YES  NO   
 (NUMBER)

**CUSTOMER NOTES**

SECTION 1 + 2 CERAMIC HC TYPE WAFER  
 NO DETENT  
 SHAFT NOT REMOVABLE

MULTIPLIER, BAND SWITCH S-201			
THE TECHNICAL MATERIEL CORP. MAHARONECK, NEW YORK.			
JA De	CSB	SW-171	B
DRAWN	CHECKED		
ALP	A. J. J.		
ELEC DES	APPROVAL		

(RTF) (RTF-2) NO. OF SECTIONS WAS 3

OAK MFG. CO.  
 1260 CLYBORN AVE, CHICAGO 10, ILL.