


REQ. PER UNIT	USED ON			SW 215	D
	MODEL	S/N	DATE		
1	PSP-350		7-15-58		
1	RTP-2	CB6001	9-23-58		

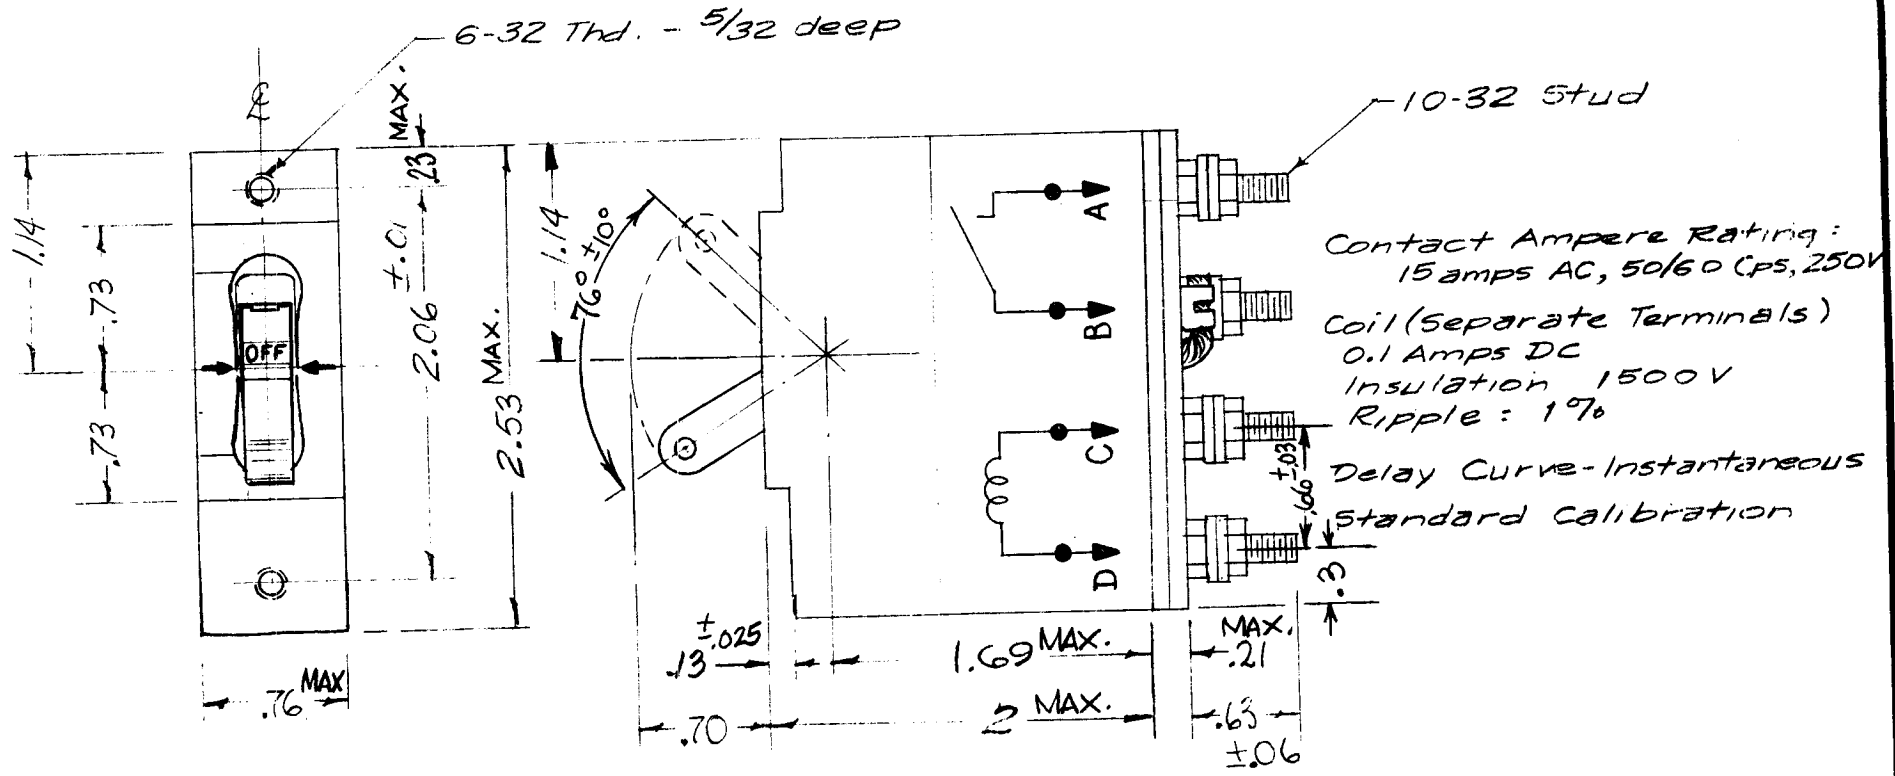

S401-450 (APLB-DC-0.1A-D50)
S401-58 (PAM12RSK MGC)

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
D		GEN'L REV. DIMS; ADD MER	7-20-67	18399	NLR	JFK	EFM			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK CIRCUIT BREAKER		
C		DIM REVISED 'ON' & 'OFF' DEL.	6-20-66	16430	WFO	JCB	JC					
B	1	S401-58 NO WAS PAM12RSK	8-30-60	2875	CY	JCB						
A	1	ON SPEC. INSULATION VOLTAGE WAS 2500V	12/1/58	495	ANC	JFK						
TOLERANCES			SCALE:									
DEC. DIM. ±.015			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.									
FRAC. DIM. ± 1/64			REMOVE ALL BURRS AND SHARP EDGES									
ANGULAR DIM. ± 1/2°												
								TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
										16/15/58	JFK	AJJ
								FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	SW 215	D