


REQ. PER. UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
3	GPT 10K	MCP-1	5-11-59

SW 239

③ 6-32 NC-2B TAPPED MTG HOLES
120° APART ON .906 RADIUS

4 TERMS SPACED
AT 60°

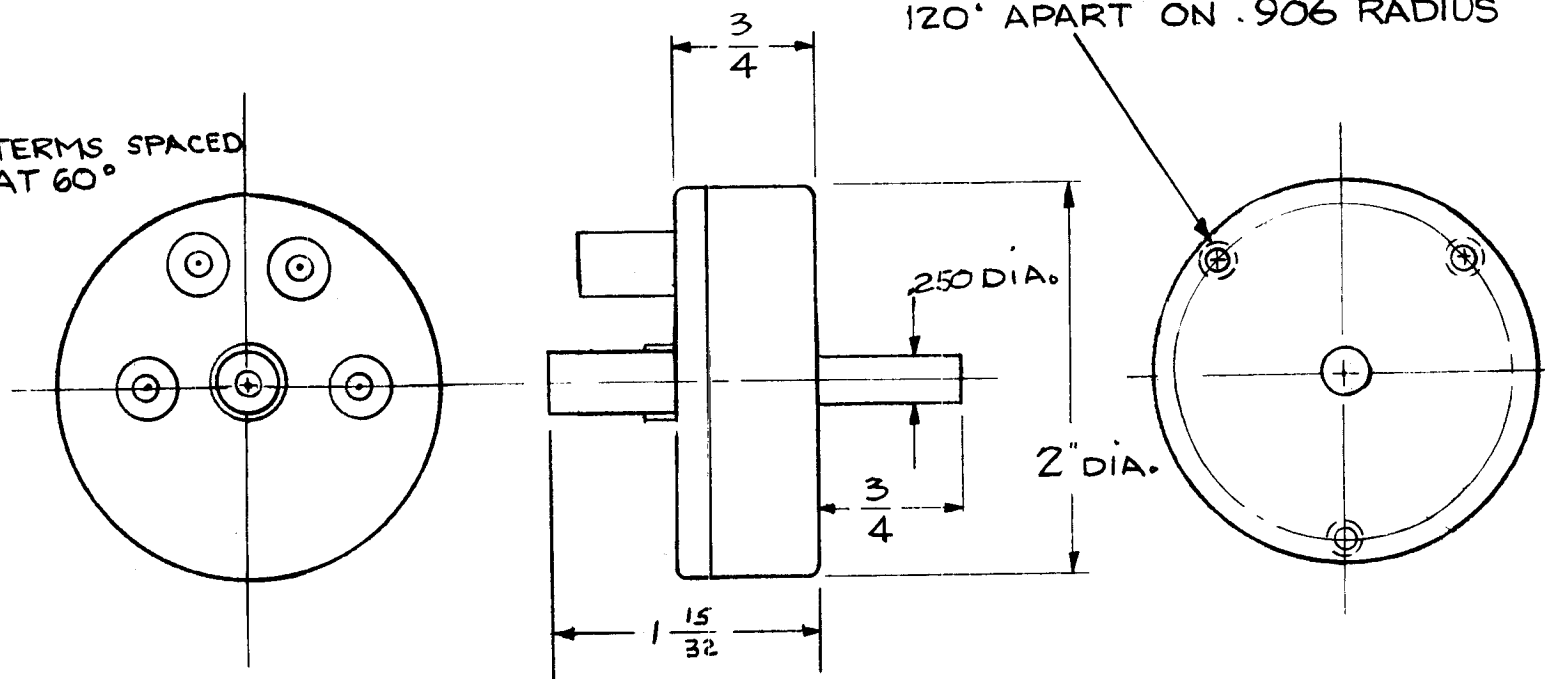

SPECIFICATIONS
BNC COAX PER MIL-C-3608
4 POSITIONS
1 SECTION
NON SHORTING
POWER-100 WATTS

TYPICAL AT 100 MC
50 Ω VSWR=1.04
CROSS TALK=-82 db

REG.	ITEM	PART NO.	DESCRIPTION		SYMBOL		
			THE TECHNICAL MATERIEL CORP.				
			MAMARONECK, NEW YORK				
			SWITCH, ROTARY				
			COAXIAL				
A	COMPLETELY REVISED	5-14-61	14084	CJK	JL		
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES		SCALE: 5401-53 (322-0114310)					
DEC. DIM. ± .005		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					
FRAC. DIM. ±							
ANGULAR DIM. ± 1/64							
		TYPE & TEMPER	HEATTREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
				J.C. BIELE		SW 239	
		FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP		