REQ. PER UNIT	USED ON			SW-244
	MODEL	ASS'Y. NO.	DATE	

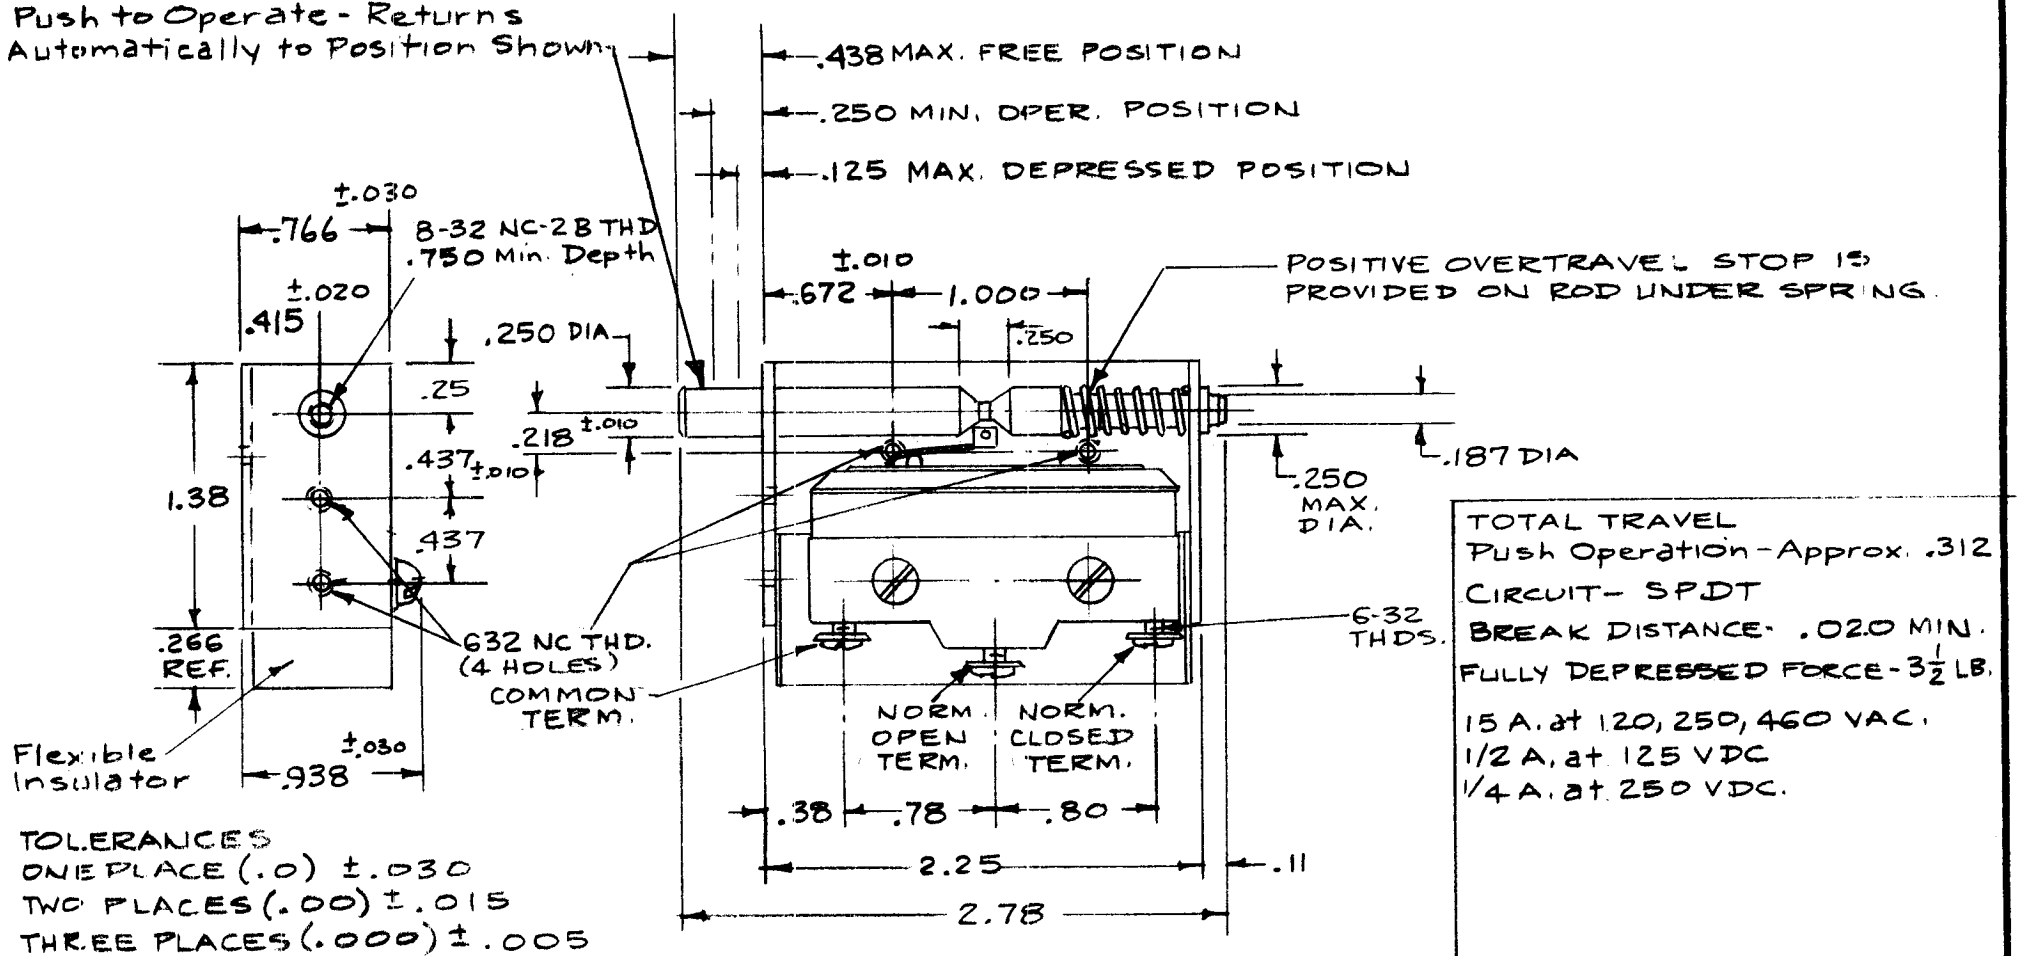

TOLERANCES
ONE PLACE (.0) ±.030
TWO PLACES (.00) ±.015
THREE PLACES (.000) ±.005

TOTAL TRAVEL
Push Operation - Approx. .312
CIRCUIT - SPDT
BREAK DISTANCE - .020 MIN.
FULLY DEPRESSED FORCE - 3½ LB.
15 A. at 120, 250, 460 VAC.
1/2 A. at 125 VDC
1/4 A. at 250 VDC.

REF - MICROSWITCH NO. X18596

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

SWITCH, INTERLOCK

TOLERANCES	SCALE: Full	STOCK SIZE	MATERIAL		DRAWN	CHECKED	FINAL APPROVAL
DEC. DIM. ± See Above FRAC. DIM. ± ANGULAR DIM. ±	MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		TYPE & TEMPER	HEAT TREAT. SPEC.	8/26/59		SW-244
			FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP	

FORM 1011-A