


APPLICATION

REVISIONS

QTY	MODEL USED ON	ASSY NO.	ITR	DESCRIPTION	DATE	E.M.N.O	DRAFT	CHKD	APPD
X	SW-489	A	✓	ORIGINAL RELEASE	9/6/69	✓	AM		✓
16	SPP-44416								

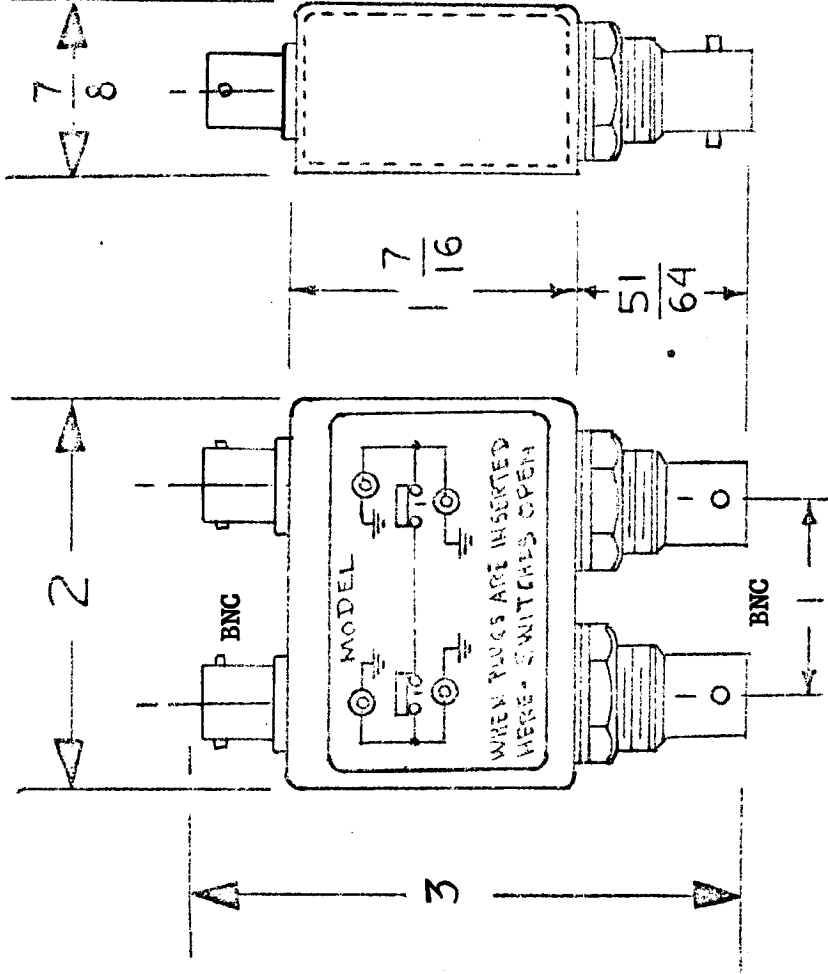

ELECTRICAL DATA

Max. peak volt. 500V  
 Freq. limit 0-32MHz  
 Nom. Impedance 75 ohms

NOTES:

- (1) CAUTION: Use only 75 ohm mating series connectors Patent No. 2,767,267
- (2) ASSIGNED: Internal Lockwasher; flat washer; Hex Nut 1/2 X 32 threads; 17/32 dia. hole; 5/16 thick material
- (3) MOUNTING: Material Brass; Finish Grey Enamel; Body Silver Flash; Dielectric Rhodium Flash; Contacts Teflor; Finish Bryllium Copper
- (4) CASE: per QQ-B-626
- (5) CONNECTORS: per TMC S-115; per QQ-5-365 Type II Grade B; per MIL-R-46085 Type I Class 2; per MIL-P-19468; Virgin per QQ-C-530 Condition HT; per MIL-G-45204 Type II Class I

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.
DECIMALS					
FRACTIONS					
.X ± .05					
.XX ± .01					
.XXX ± .005					
TOLS.					
1/64					
ANGLES					
0° .30'					
MATERIAL					
SEE NOTES					
FINISH					
SEE NOTES					
LIST OF MATERIAL					
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK					
SWITCH R. F. NORMAL-THRU, SELF LOOP BNC TO BNC					
SIZE	CODE IDENT. NO.	DWG NO.	ISSUE		
A	82679		SW-489		
SCALE			SHEET	OF	

NOTICE TO PERSONS RECEIVING THIS DRAWING  
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.