
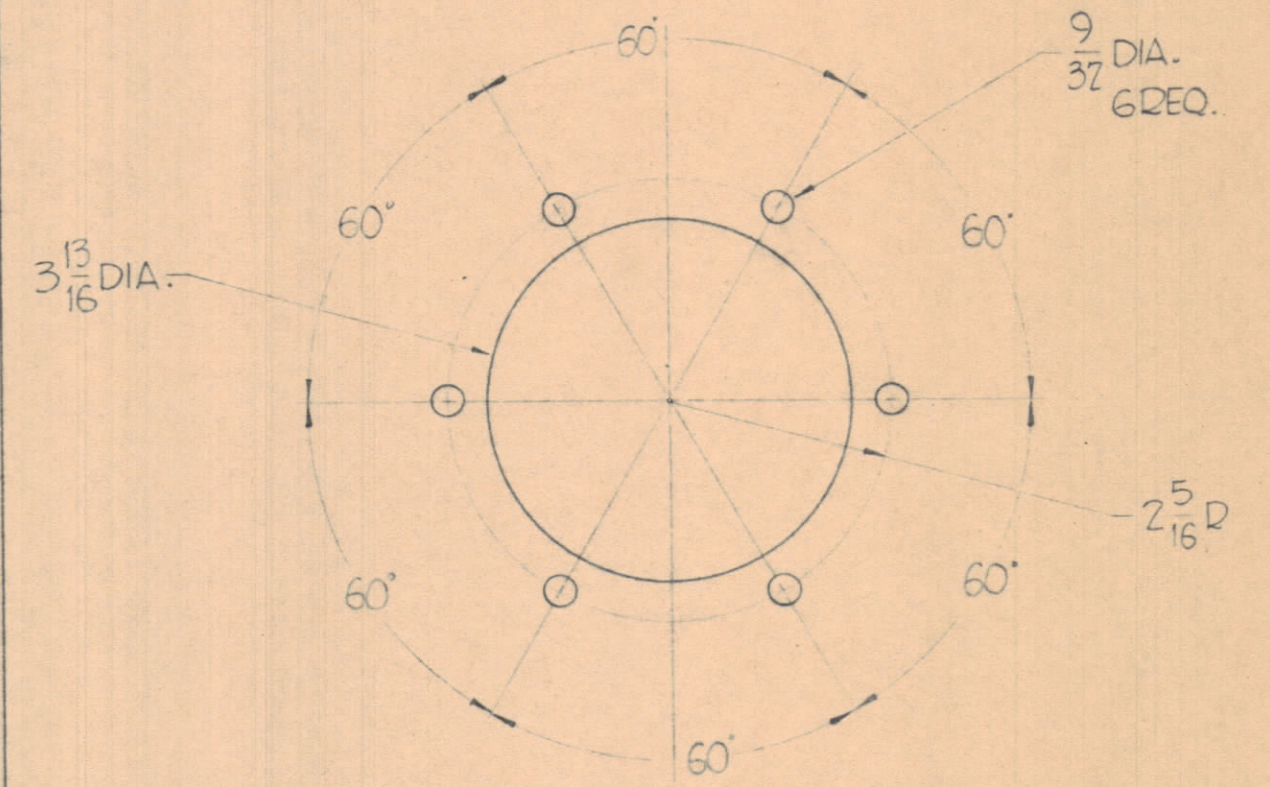


HOLES

- A - $\frac{3}{16}$ DIA. 16 REQ.
- B - SEE DETAIL 2 REQ.

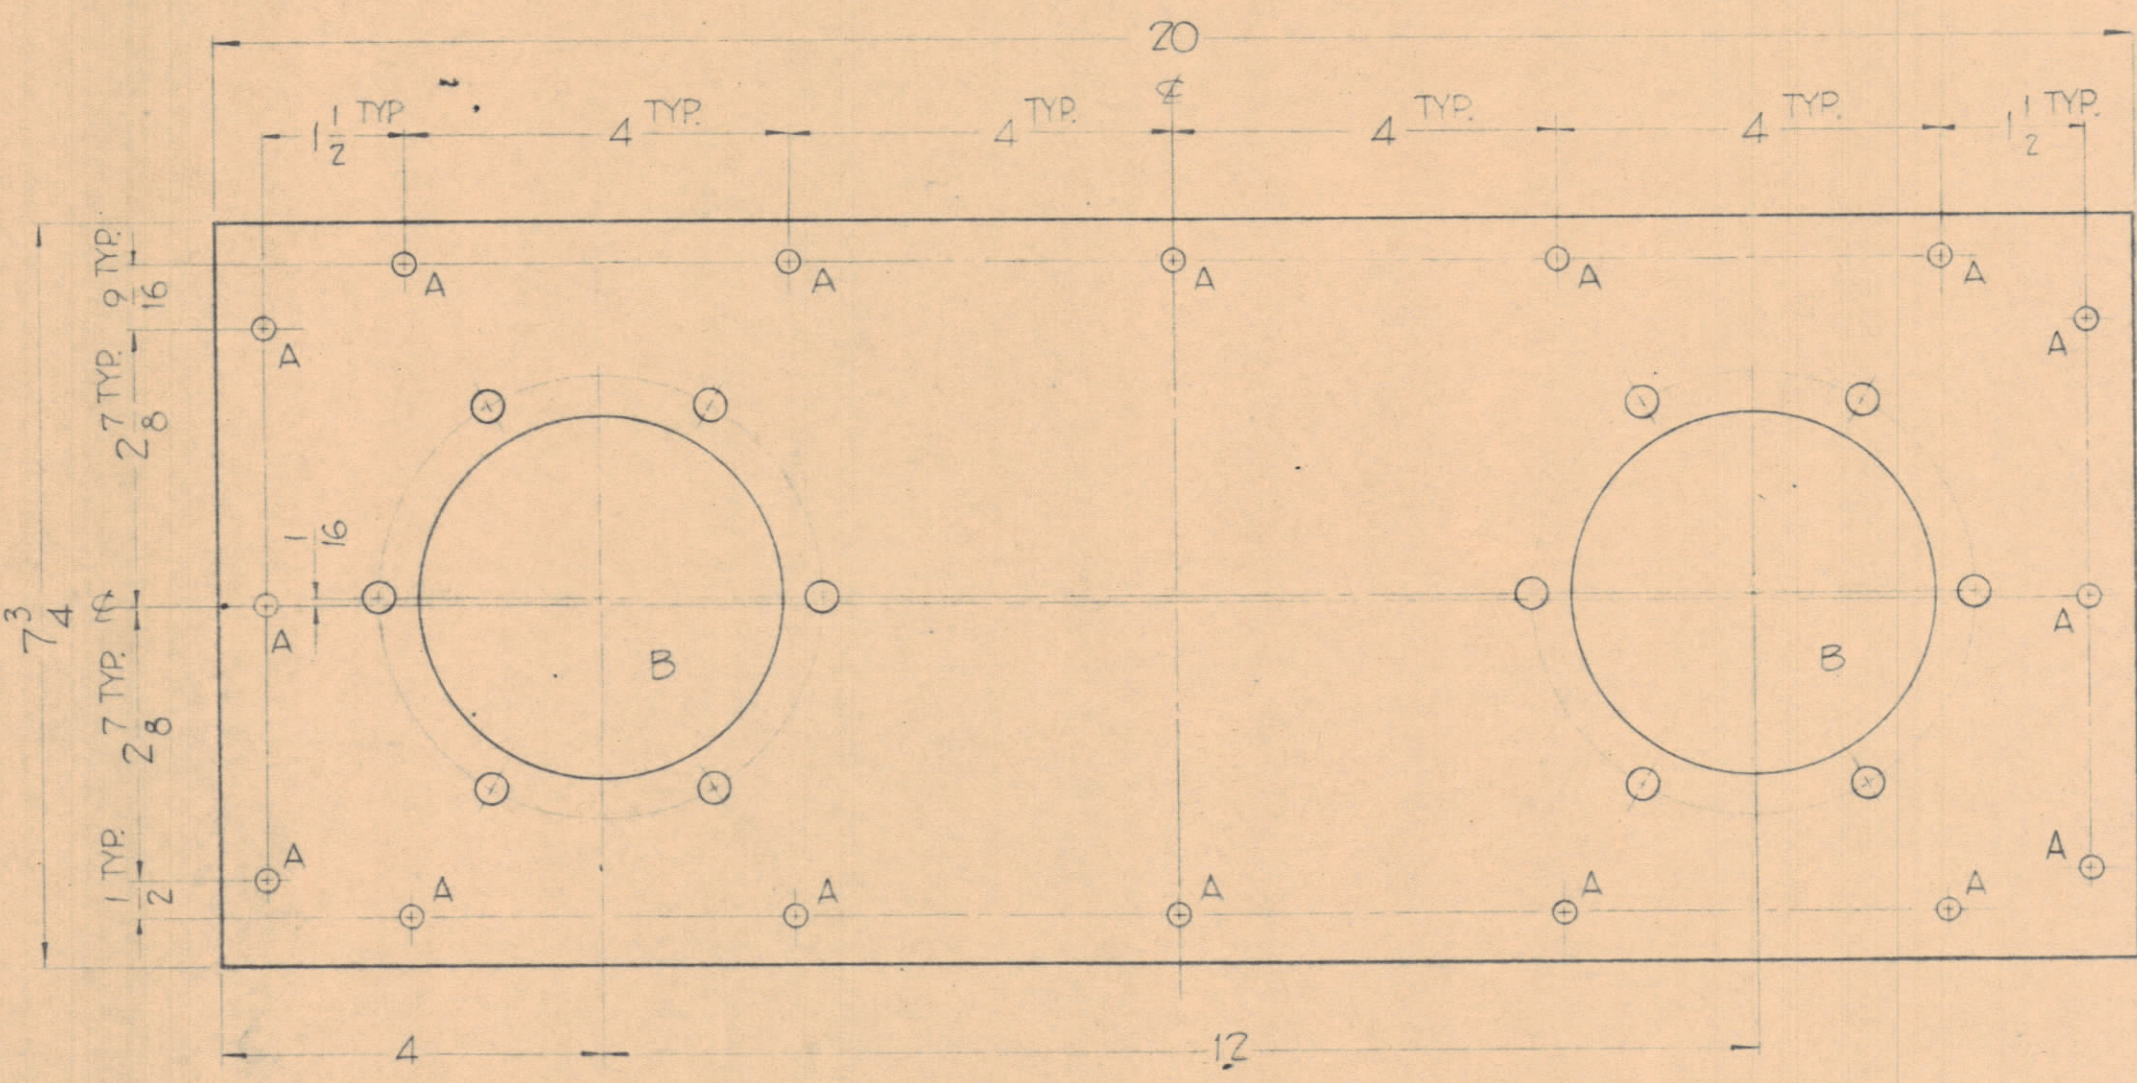

DETAIL "B"

NOTE - MOUNT TMC PART NO. NS-123 IN "B" HOLES.
 THE FUNCTION OF THE INSULATORS (NS-123) IS TO ACT AS A BALANCED RF FEED LINE.

Orig. in Virginia
 AUG 13 1962

SYM	ZONE	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED:			SCALE (DO NOT SCALE)				
DIMENSIONS ARE IN INCHES			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS & SHARP EDGES				
TOLERANCES ON							
FRACTIONS $\pm 1/64$			DECIMALS $\pm .005$				
			ANGLES $\pm 1/2^\circ$				

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
	SYM2003-4			11-6-61

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
1/8 THICK		THE TECHNICAL MATERIEL CORP.	
STOCK SIZE		MAMARONECK, NEW YORK	
ALUMINUM		PLATE, INSULATOR MOUNTING	
MATERIAL		SHELTED NO. 4	
		John C. Biele	
		DRAWN	CHECKED
		FINAL APPROVAL	
		SY-1295	
		FINISH & SPEC. NO.	ELEC. DES. APP. MECH. DES. APP. SHEET OF