


THICKNESS CHART			MFG. CODE		COLOR CHART		REQ. PER UNIT	USED ON			TA 111	B
THICKNESS	CODE	CODE	COLOR SEE NOTE	CODE	MODEL	ASS'Y. NO.		DATE				
1/8"	1	761	BLACK	A								
1/4"	2	763										
3/8"	3	765	CREAM-WHITE	C								
1/2"	4	766										
WIDTH CHART					GREY	G						
WIDTH (IN.)	CODE											
1/4	2											
3/8	3											
1/2	4											
3/4	6											
1	8											
1-1/4	10											
2	16											
4	32											
6	48											
22	22											

Material - Plastic Foam (Polyurethane)  
 Max. Service Temp. - Continuous, 212°F dry Heat  
 140°F wet Heat  
 Melting Point - Between 296°F & 330°F.

AVAILABILITY NOTE:  
 COLOR "G" ONLY (WIDTHS 10, 16, 22, 32, 48)  
 COLOR "A", "C", OR "G" (WIDTHS 2, 3, 4, 6, 8)

Type Designation to be as follows:  
 TA 111 - 2 - 4 - 5.00 C  
 TMC DWG. NO. THK. WIDTH LENGTH COLOR  
 (See chart) (See chart) (inches) (See chart)

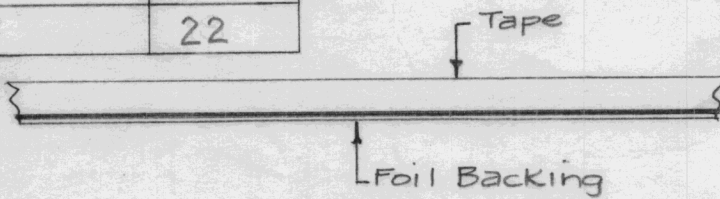

Purch. Info. - 1/4 & 1/8 THK. Avail. in 33 ft. Rolls.  
 3/8 & 1/2 THK. Avail. in 18 ft. Rolls.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B		COMPLETELY REVISED	8-22-67	18468	H.G.	<i>[Signature]</i>	EFM
A	1	THICKNESS & WIDTH CHARTS REVISED W/CHANGES	1/2/64	10687	<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>
TOLERANCES			SCALE: 5401-447				
DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES				

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
	STOCK SIZE	TAPE, URETHANE	
	MATERIAL		
		16 5/2/58	A.J.J.
	TYPE & TEMPER	DRAWN	FINAL APPROVAL
	HEAT TREAT. SPEC.	<i>[Signature]</i>	<i>[Signature]</i>
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
		TA 111	B