


REQ. PER UNIT	USED ON			TA115	∅
	MODEL	ASS'Y. NO.	DATE		
	VLRB-1	A3930	11-12-64		
	VLRB-1	A3931	11-12-64		

TMC PART NO.	"L"	"W"	SCORE	ORIFICE	USE
TA115-1	1 7/8	ROLL	NONE	----	-----
TA115-2	1 7/8	3 3/8	27/32	----	TA115-1
TA115-3	1 11/16	2 1/2	5/8	2 1/2	-----

MATERIAL:
 POWDERED IRON (MAGNETITE) WITH A FLEXIBLE RESIN BINDER ON KRAFT PAPER TAPE WHICH IS .004 ± .0005 THICK.

TAPE MAY BE PURCHASED CUT TO SIZE WITH SCORE OR BY ROLL UNSCORED. (SEE CHART)

APPLICATION: SHIELDING OF CANS ON RF AND IF TRANSFORMERS.

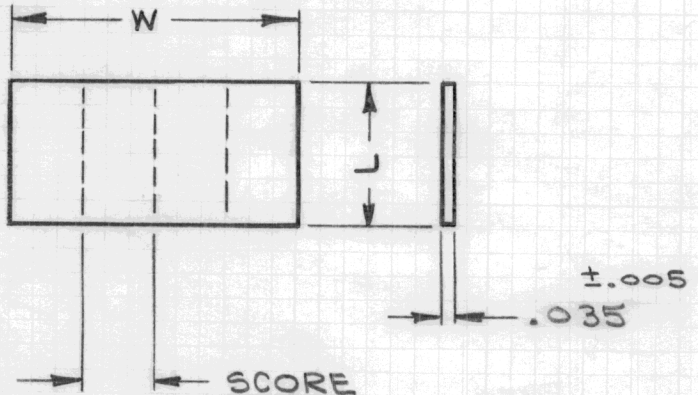

∅	ORIGINAL RELEASE FOR PRODUCTION	3/8/65	AA	JL		
X2	.035 was .040	3/8/65	X2	100	ms	
X1	QTY/UNIT DELETED	12-9-64	X1	G.D.L		
X	EXPER. RELEASE	11-2-64	X	Phan		

REQ. ITEM	PART NO.	O. POSE	DESCRIPTION	SYMBOL
			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	SEE NOTES		SHIELDING TAPE, FLEXIBLE	
MATERIAL				
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
				TA115 ∅
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	NONE
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE C
		S401-330	