SPECIFICATIONS:

SERIES – N TO CABLE 1⅝ STYROFLEX
No. OF CONTACTS – ONE (1)
TYPE OF CONTACT – FEMALE
DIELECTRIC – TEFLON

ELECTRICAL DATA:

MAX. PEAK OPR. VOLT. –
NOMINAL IMPEDANCE – 70 OHMS

CABLE ACCOMMODATIONS:

TYPE – 1⅝ STYROFLEX 70 OHMS
MAX. O.D. –

MATERIAL:

EXTERNAL PARTS – ALUMINUM
CONTACTS – FEMALE – BERYLLIUM, MALE – BRASS
CLAMP – STAINLESS STEEL

FINISH:

EXTERNAL PARTS – SILVER PLATE & RHODIUM FLASH
CONTACTS – SILVER PLATE & GOLD FLASH

TCA-ST71625/N

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD

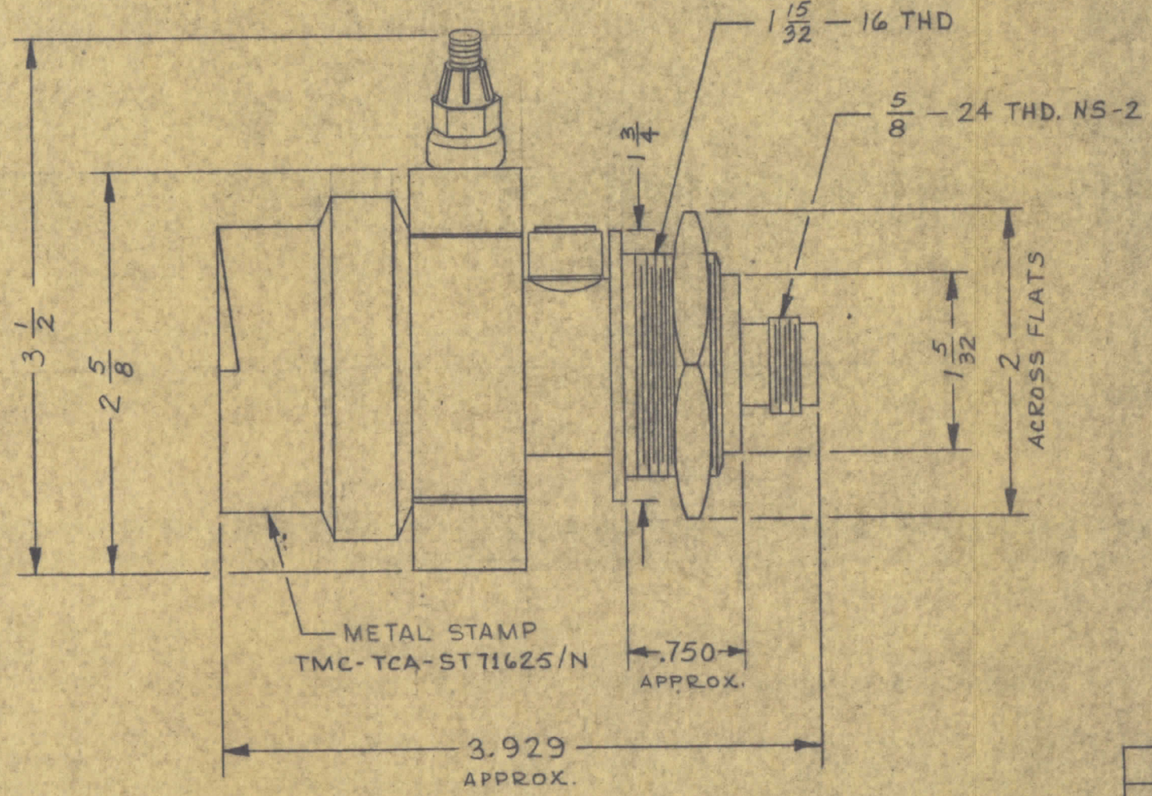

FEB 12 1963

NOTE:
INSTALLATION INSTRUCTIONS –
S-345 / TCA SERIES 1⅝ STYROFLEX

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
X	1	GL-118	COMPOUND, SILICONE, DIELECTRIC	

LIST OF MATERIAL

MATERIAL: SEE NOTES

FINISH: SEE NOTES

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS .X ± .05, .XX ± .01, .XXX ± .005 — TOLERANCES — FRACTIONS ± 1/64, ANGLES ± 0° 30'

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TITLE: CONNECTOR, RECEPTACLE STYROFLEX TO N (FEMALE), 1⅝ – 70 OHMS BULKHEAD MOUNT

DRAWN M.J. TANTILLO	DATE 2-8-63	FINAL APPROVAL	DATE 2/11/63
CHECKED	DATE		
ELECT. DES.	DATE	TCA-ST71625/N	
MECH. DES.	DATE 2/8/63	SHEET	REV. LTR.

Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	S-401-70( )

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

NOTES

TMC FORM 109