
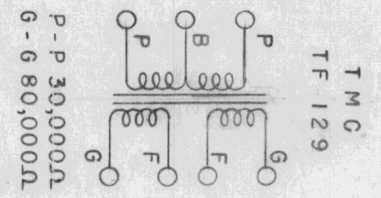
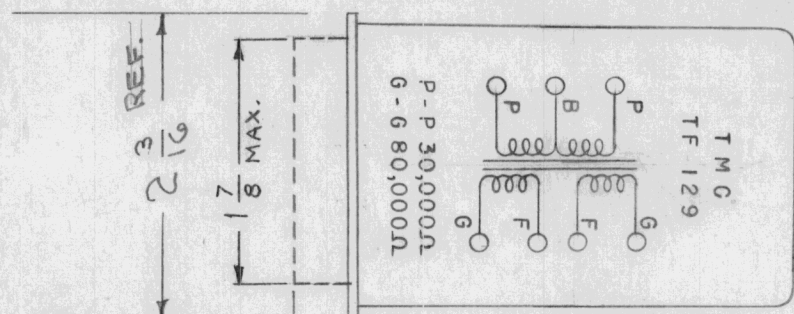


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

TF 129 D

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	USED ON			
	MODEL	PROJECT NO.	ASS'Y. NO.	DATE
3	RSD-1	170		10-5-53




15/16 REF.
3/4 REF.


APPLICATION - 2 PLATES TO 2 GRIDS
 PRI. IMP. - 30,000 Ω P TO P
 SEC. IMP. - 80,000 Ω OVERALL
 1.6 TO 1 RATIO OVERALL
 D.C. RATING -
 15 MA PRIMARY (EA. SIDE BAL.)
 SECONDARY - NONE
 MAX. AUDIO OPER. LEVEL - +32 dBm
 RATED OPER. FREQ. -
 40 - 10,000 CPS
 RATED DB. VARIATION OVER RANGE -
 ± 1.5 DB

2 3/16 REF


TERM. STYLE OPTIONAL

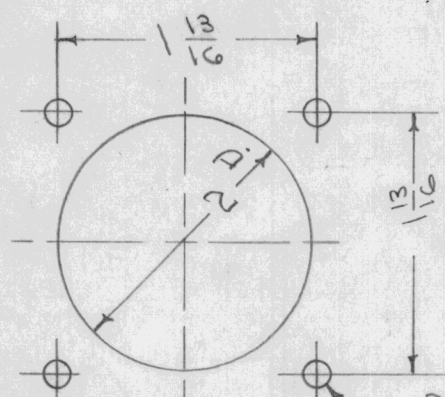

STAMP TOP OF CAN AS SHOWN
 YB HIGH
 BLACK GOTHIC



STAMP SCHEMATIC DIAGRAM ON SIDE OF CAN AS SHOWN ABOVE.

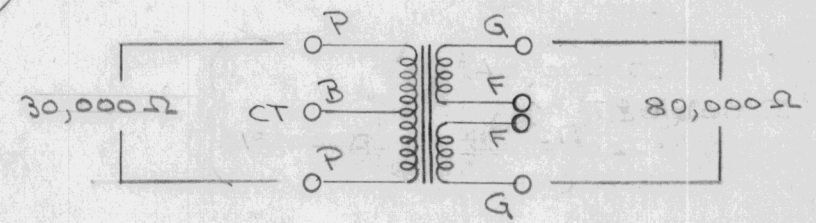

REF UNITED TRANS. CO. CAT. NO. 49-133

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			THE TECHNICAL MATERIEL CORP.	
			MAMARONECK. NEW YORK	
			TRANSFORMER	
			AUDIO FREQUENCY	
			TYPE & TEMPER	
			DRAWN	
			ELEC. DES. APP.	
			MECH. DES. APP.	
			CHECKED	
			FINAL APPROVAL	
			TMC GRAY S115	
			FINISH & SPEC. NO.	
			TF 129	D

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
D		DWG UPDATED	12-13-60	17450	RME	CFB	
C	1	SCHEMATIC ADDED TO CASE	10/24/56	3	COO	HVE	A.J.J.
B	1	DC RATINGS ADDED SCHEMATIC ADDED	9/2/55	2	COO		A.J.J.

TOLERANCES		SCALE
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	S401-29 (CG-133)
	C	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.