IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

STANDARD DRAWING

TF-137

REQ. PER UNIT	USED ON			
	MODEL	PROJECT NO.	ASS'Y. NO.	DATE

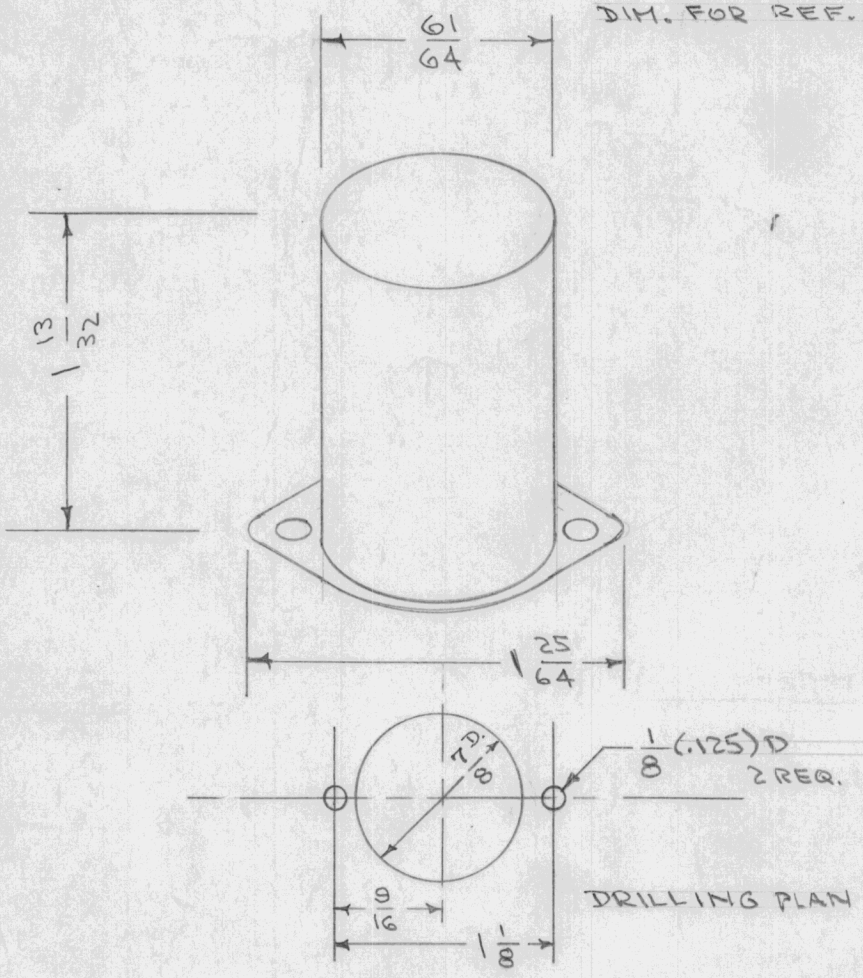

DRILLING PLAN

DIM. FOR REF. ONLY

RECOMMENDED APPLICATION - MIKE, PICKUP, LINE TO GRID.
MIL TYPE - TF1A10YY
PRI. IMP. OHMS - 50, 200 CT, 500 CT*
SEC. " . " - 50,000
DC IN PRI. MA - 0
RESPONSE ± 2db (CYC.) - 50 - 10,000
MAX. LEVEL dbm - +5

*200 Ω TERM. CAN BE USED FOR 150 Ω OR 250 Ω, 500 Ω TERM. CAN BE USED FOR 600 Ω

REF. UNITED TRANSFORMER CO.

TYPE H-1, CASE RCOF (RC25)

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL | WEIGHT PER PC.

TYPE & TEMPER

HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

TRANSFORMER, AUDIO

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.

DRAWN	ELEC. DES. APP.	MECH. DES. APP.
C.D.D. 9/30/54	K Z	W.D.E.

CHECKED	FINAL APPROVAL
J.A.D.	A. J. J. W.D.E.

TOLERANCES

SCALE S401-29

ALL OTHERS
DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

C

DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

TF-137

FORM — 108