


DIM. FOR REF. ONLY
YELLOW DOT TO INDICATE
"MU" METAL CASE.

STAMP MFGR PART & TYPE NO.
STAMP AS SHOWN
BLACK GOTHIC


1 13/32

25/64

NOTE:
MTG. FLANGE MAY BE
WITH SLOTS OR HOLES.

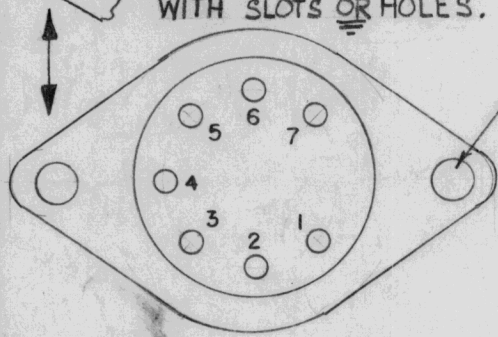

1/8 D
2 REQ.

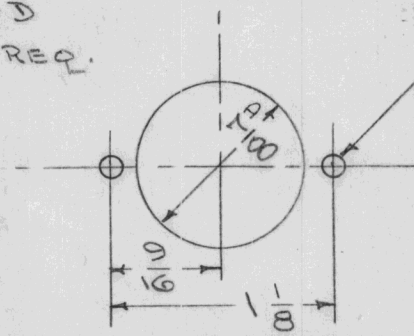

DRILLING PLAN

REQ. PER UNIT	USED ON			TF-138 G
	MODEL	ASS'Y. NO.	DATE	

STANDARD DRAWING

RECOMMENDED APPLICATION - SINGLE OR P.P. PLATES TO LINE.

MILITARY TYPE - TF4RX13YY
 PRI. IMP. OHMS - 20,000 C.T
 SEC. IMP. OHMS - 150/600 600 OVERALL
 DC IN PRI. MA - 4
 RESPONSE - ± 2db (CYC) - 200-10,000
 MAX. LEVEL dbm - +21
 RATIO OF TURNS OVERALL PRI. TO OVERALL SEC. - 5.78-1
 7 TERMINALS - SOLDER LUG TYPE
 FINISH - SMOOTH GREY ENAMEL (TMC SPEC S-115).
 CASE - MUST BE "MU" METAL, HERMETICALLY SEALED. COLOR CODE CASE WITH YELLOW DOT TO INDICATE "MU" METAL CASE.

1/8 (.125) D. 2 REQ.

REF. UNITED TRANSFORMERS CO.
TYPE H 7 CASE TYPE RCOF

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL					
E	1	ADDED CASE NOTE	5-3-62	4793							THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK TRANSFORMER, AUDIO						
D	1	TF4RX13YY WAS TF1RX13YY	9/2/60	3089													
C	1	STAMPING INFO ADDED	12/1/60	3													
G	1	TF4RX13YY WAS TF1RX13YY	12-5-62	7774													
TOLERANCES			SCALE: 5401-29					TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL				
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	TF-138 G					
FRAC. DIM. ±																	
ANGULAR DIM. ±																	