
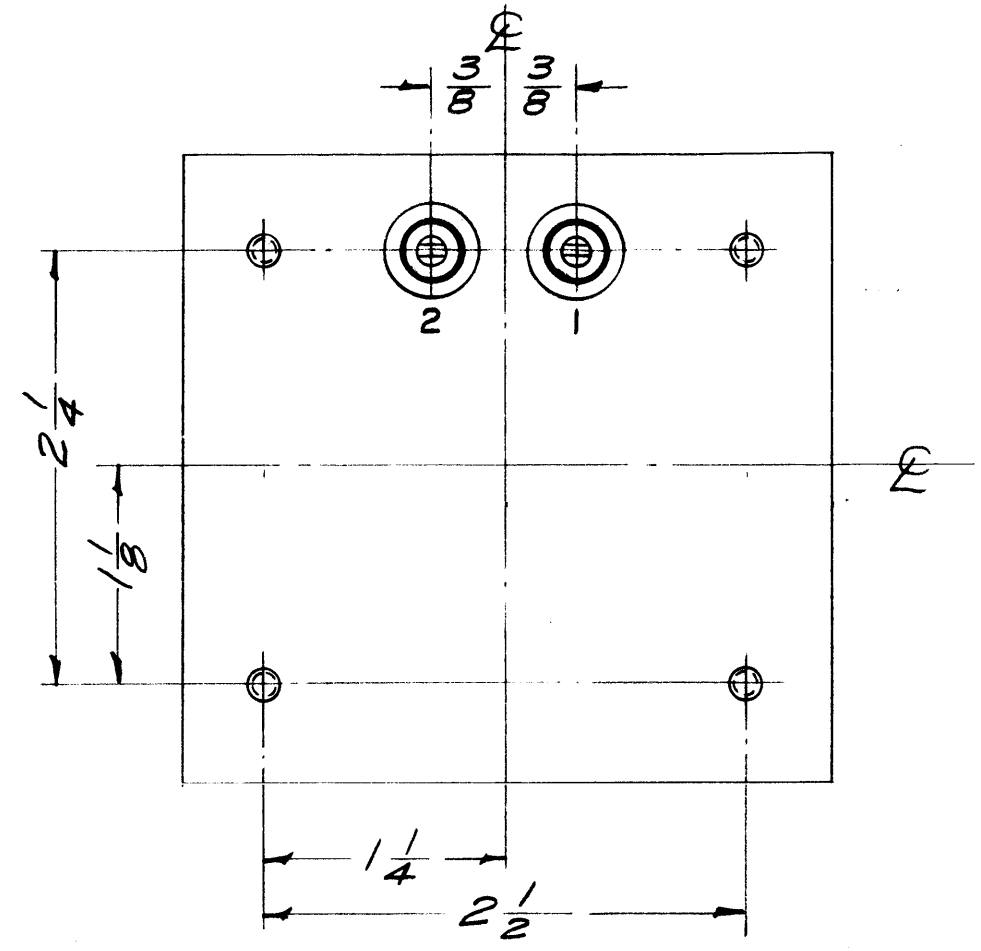
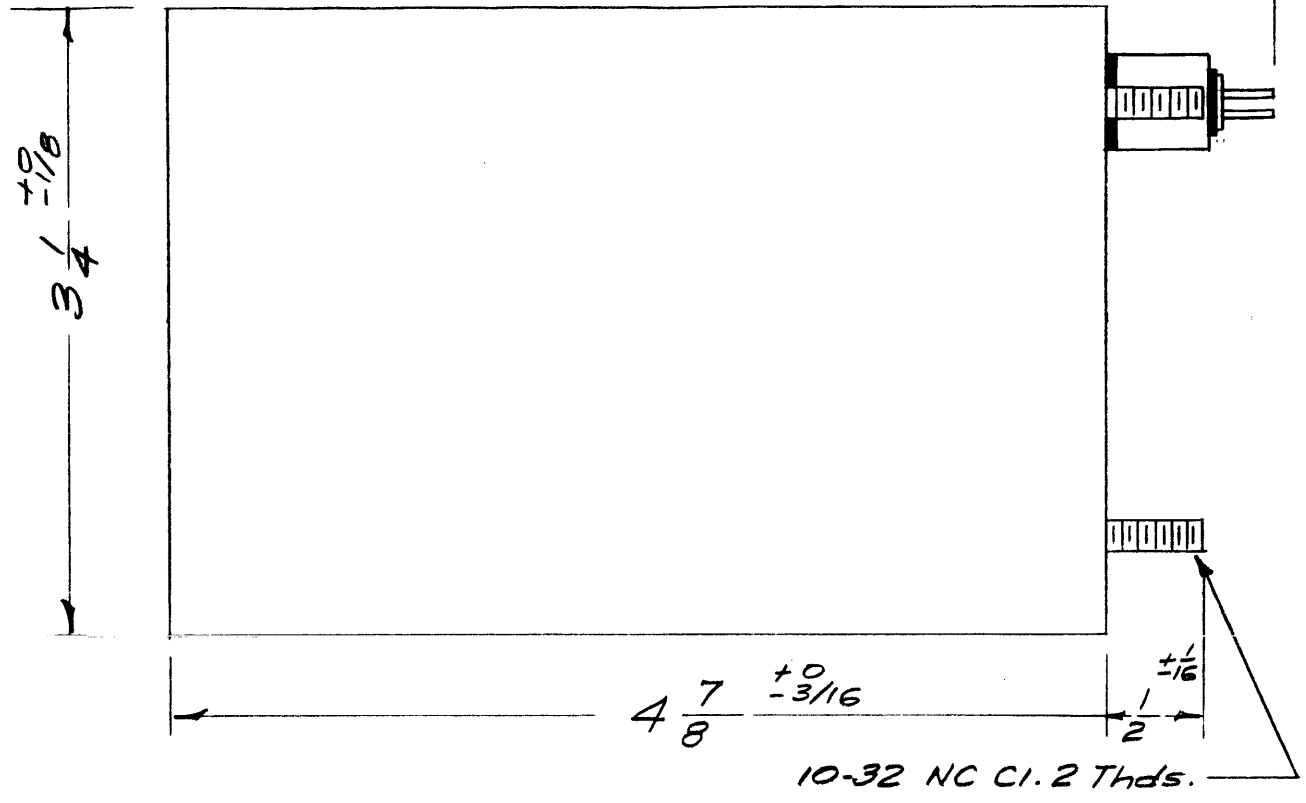


TF-184 A

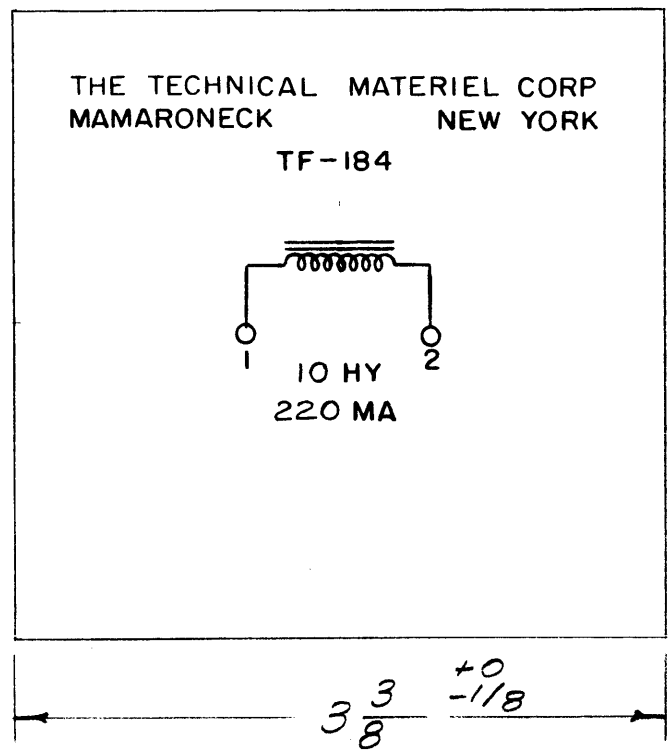

**ELECTRICAL SPECIFICATIONS:**  
 Inductance - 10 Hy. at Full Current Rating.  
 DC Current Rating - 220 MA  
 DC Resistance - Approx. 80 Ω  
 Insulation - Winding to be insulated for 5000V

**MECHANICAL SPECIFICATIONS:**  
 Case - Rectangular, Steel, MIL Type YY, Hermetically Sealed.  
 Finish - TMC Smooth Grey Enamel, (5115), except terminal end.  
 Size - 3 1/4 x 3 3/8 x 4 7/8 high, excluding studs and terminals.  
 Stamping - Terminals shall be metal stamped 1 & 2 as shown. Opposite end shall be rubber stamped in black as shown.

NOTE: MANUFACTURED IN ACCORDANCE WITH MIL SPEC T-27-A EXCEPT THAT MIL SPEC T-27-A SHALL NOT APPEAR ON CASE AND QUALIFICATION TESTING IS NOT REQUIRED.

A	1	NOTE ADDED (MIL T-27A)	6-29-40	2572				
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
TOLERANCES			SCALE: FULL					
DEC. DIM. ± 1/64			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.					
ANGULAR DIM. ±			REMOVE ALL BURRS AND SHARP EDGES					

REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.	DATE
USED ON				

REQ. ITEM	PART NO.	DESCRIPTION		SYMBOL
STOCK SIZE		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
MATERIAL		REACTOR		
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
		167/21/58		A. J. J.
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	TF-184 A