


TF-192 B

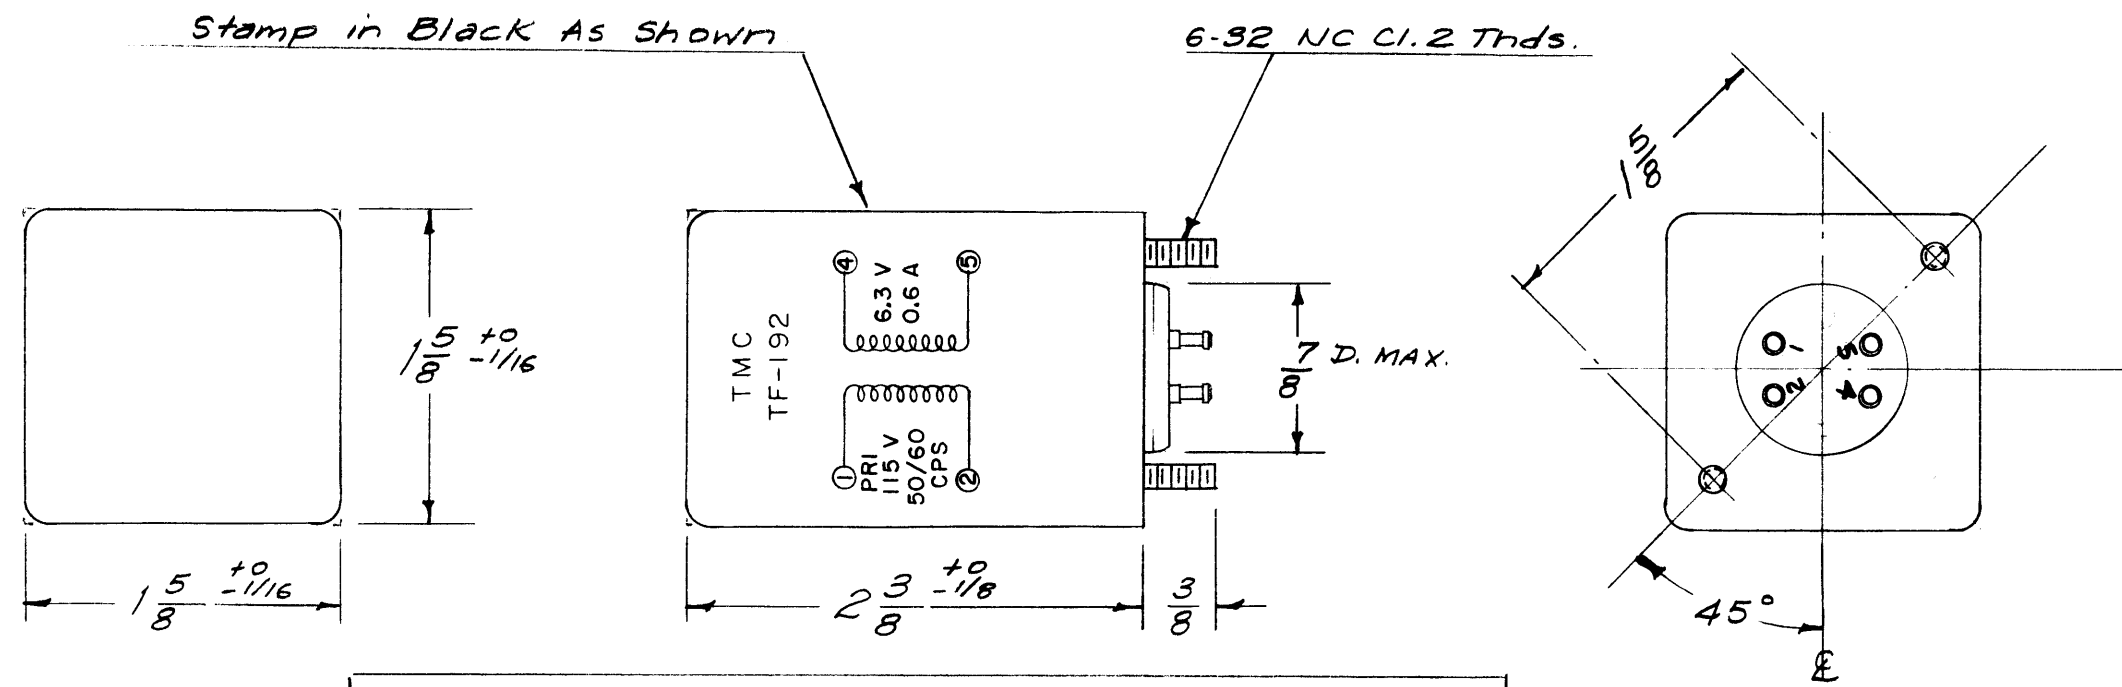

ELECTRICAL SPECIFICATION:
 PRIMARY - 115 VAC, 50/60 CPS, SINGLE PHASE
 SECONDARY - 6.3 Volts. 0.6 Amps RMS
 INSULATION TEST VOLTAGE - 1500 V.

MECHANICAL SPECIFICATIONS:
 CASE - RECTANGULAR, STEEL, MIL TYPE YY, (AJ MODIFIED)
 HERMETICALLY SEALED
 FINISH - TMC SMOOTH GREY ENAMEL (S115), EXCEPT TERMINAL END.
 SIZE - 1-5/8 X 1-5/8 X 2-3/8 HIGH MAXIMUM., EXCLUDING STUDS AND TERMINALS

NOTE: MANUFACTURED IN ACCORDANCE WITH MIL SPEC T-27-A EXCEPT THAT MIL SPEC T-27-A SHALL NOT APPEAR ON CASE AND QUALIFICATION TESTING IS NOT REQUIRED.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	1	NOTE ADDED (MIL T-27-A)	6-29-60	2572			
A	-	SEC. Clarified	1/24/58	-			

TOLERANCES

SCALE: S401-159 (HSM-223)

DEC. DIM. ± 1/64
 FRAC. DIM. ± 1/64
 ANGULAR DIM. ±

C

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

1	S-394	ATS MOD. KIT	9/18/58
REQ. PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.
			DATE

USED ON

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		TRANSFORMER, POWER, STEP-DOWN (FILAMENT)	
		16 9/18/58	
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
			FINAL APPROVAL
		ELEC. DES. APP.	MECH. DES. APP.
		TF-192	B