
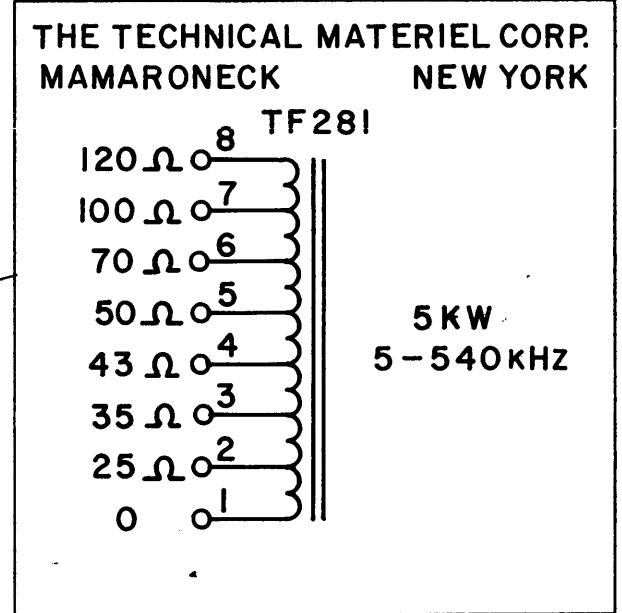


STANDARD DRAWING


TF281

REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXP. RELEASE	10/14/66		JL	JL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	1-9-67		WFW		

1/4" -20 MTG. STUDS
(4-REQ)

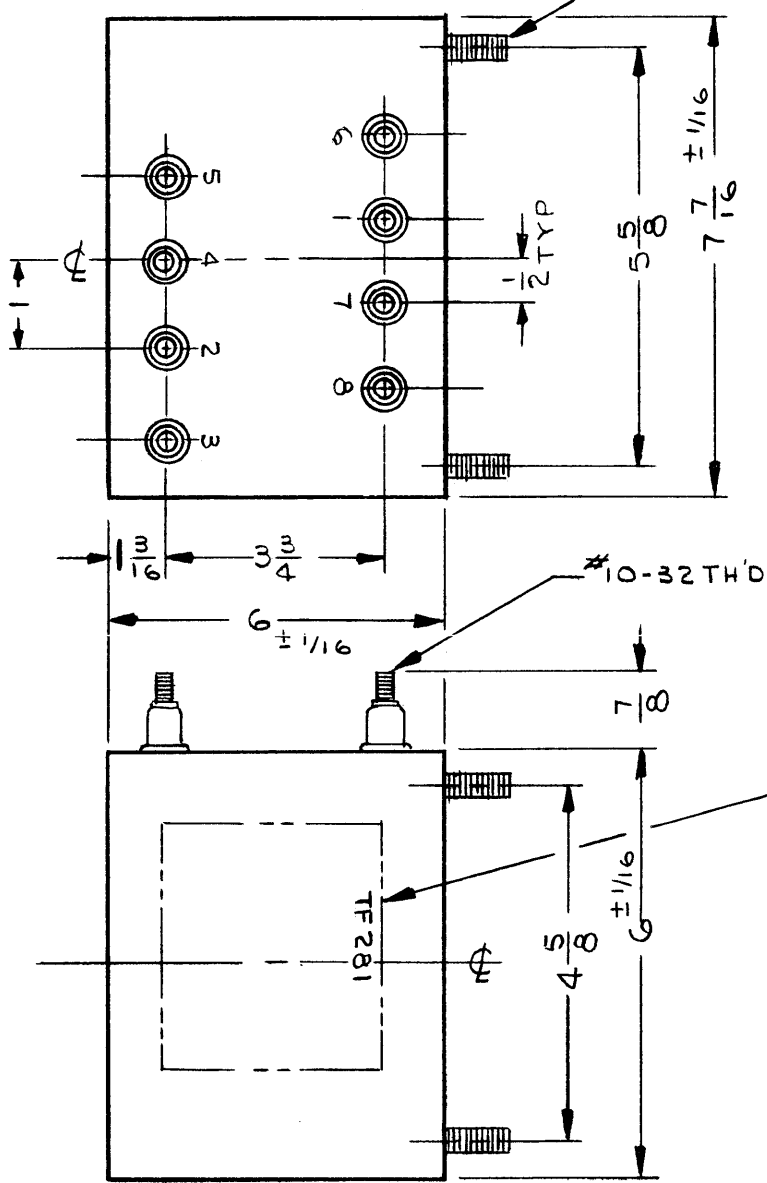

SCHEMATIC STAMP

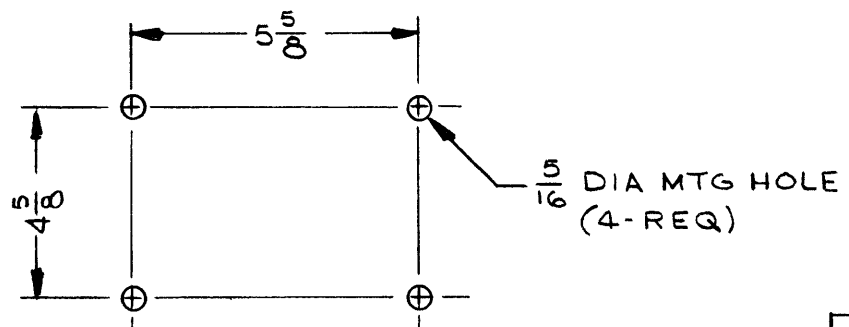

MTG DETAIL

NOTES

1	GPT-10KLF	
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	S401-30 (5201)
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

SPECIFICATIONS

ELECTRICAL

INSULATION TEST VOLTAGE: 2 KV RMS
 POWER CAPABILITY: 5 KW AVERAGE
 25 KW PEAK
 FREQUENCY: 5-540 KHZ

TAP DATA

QUANTITY: 8
 IMPEDANCE: 0, 25, 35, 43, 50, 70, 100, 120 Ω

MECHANICAL

CASE: COLD ROLLED STEEL
 FINISH: S115 SMOOTH GREY ENAMEL (EXCEPT TERMINALS)
 TERMINALS: CERAMIC, STANDOFF THREADED STUD (#10-32 THD)
 TOLERANCE: ±1/32 UNLESS OTHERWISE SPECIFIED

STAMPING

ACCORDING TO TMC SPEC S727, BLACK GOTHIC LETTERING & LINE WORK. SCHEMATIC TO BE PLACED AS SHOWN

NOTE:

MANUFACTURED IN ACCORDANCE WITH MIL SPEC T-27-A EXCEPT THAT MIL SPEC T-27-A SHALL NOT APPEAR ON CASE AND QUALIFICATION TESTING NOT REQUIRED

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
BUDETTI LIST OF MATERIAL				
MATERIAL			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH			TITLE FIXED AUTOTRANSFORMER, R.F.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			DRAWN J. LESHINSKI CHECKED ELECT. DES. MECH. DES.	DATE 10/14/66 DATE 11/11/66 DATE DATE
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			TOLERANCES FRACTIONS ± 1/64 ANGLES ± 0° 30'	
FINAL APPROVAL DATE 11/9/67 SHEET TF281 REV. LTR. Ø				