REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	TF-287	B
1	AZ-102		4-7-64		

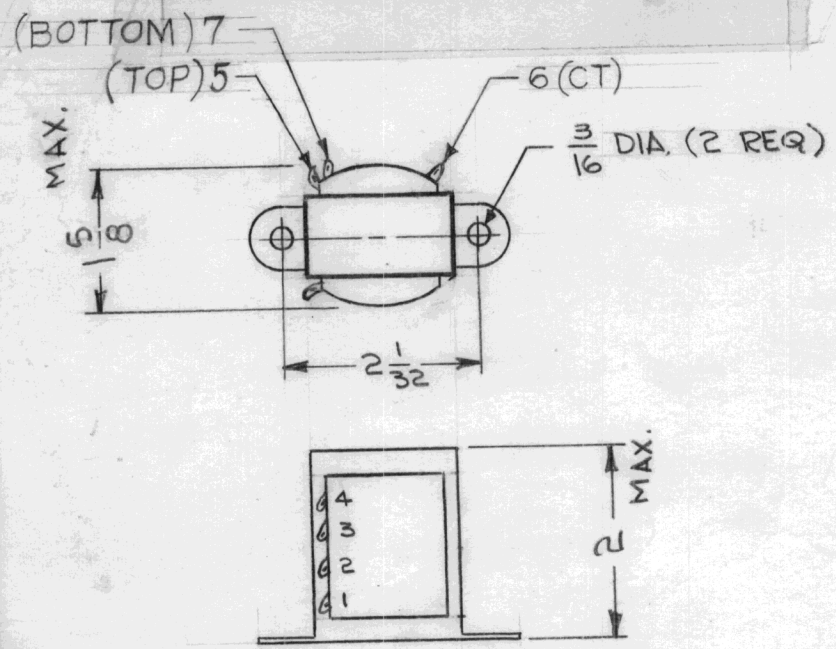

SPECIFICATIONS

1-CASE DATA:
- (A) HERMATICALLY SEALED
- (B) OPEN FRAME

2-PRIMARY WINDING:
- (A) VOLTAGE- 115/230V
- (B) FREQUENCY- 50/60 cy
- (C) PHASE- SINGLE POLE

3-SECONDARY WINDING:
- (A) VOLTAGE- 44 V
- (B) CENTER TAP- 22 V
- (C) CURRENT RATING- 420 MA

4-TERMINAL DATA:
- (A) QUANTITY- 7
- (B) TYPE- SOLDER LUG

NO LONGER AVAILABLE, REPLACED BY DST-6-48
TMC P/NO. TF 452

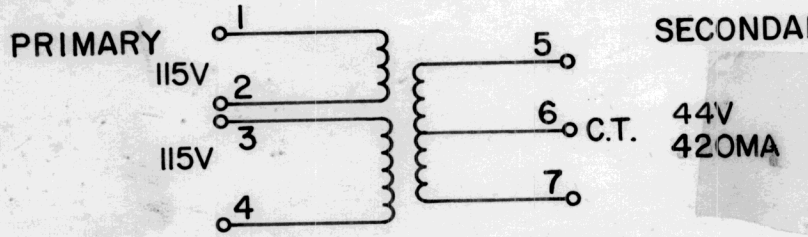

SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
C	NOTE NO LONGER AVAL ADD	9-17-64				
B	1 5/8 MAX WAS 1 1/2 MAX	7-17-64	11861	SRG	@	
A	CURRENT RATING WAS 250	7-2-64	11719	A.M.	@	
0	ORIGINAL RELEASE	4.28.64		WB		
X	EXPER. RELEASE	4-7-64	1		@	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1

TOLERANCES
DECIMALS .X ±.05, .XX ±.01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE C

S401-30 (6109)

REQ.	ITEM	PART NO.	HAY	DESCRIPTION	SYMBOL
		1			

STOCK SIZE: 1

MATERIAL: 1

TYPE & TEMPER: 1 | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

TRANSFORMER, POWER

DRAWN	CHECKED	FINAL APPROVAL
GF	@ 4-20-64	RM

ELEC. DES. APP.	MECH. DES. APP.	
MM 4/27/64	JC 4/27/64	TF-287 C

STOCK NO. 1015

TMC FORM-108-A