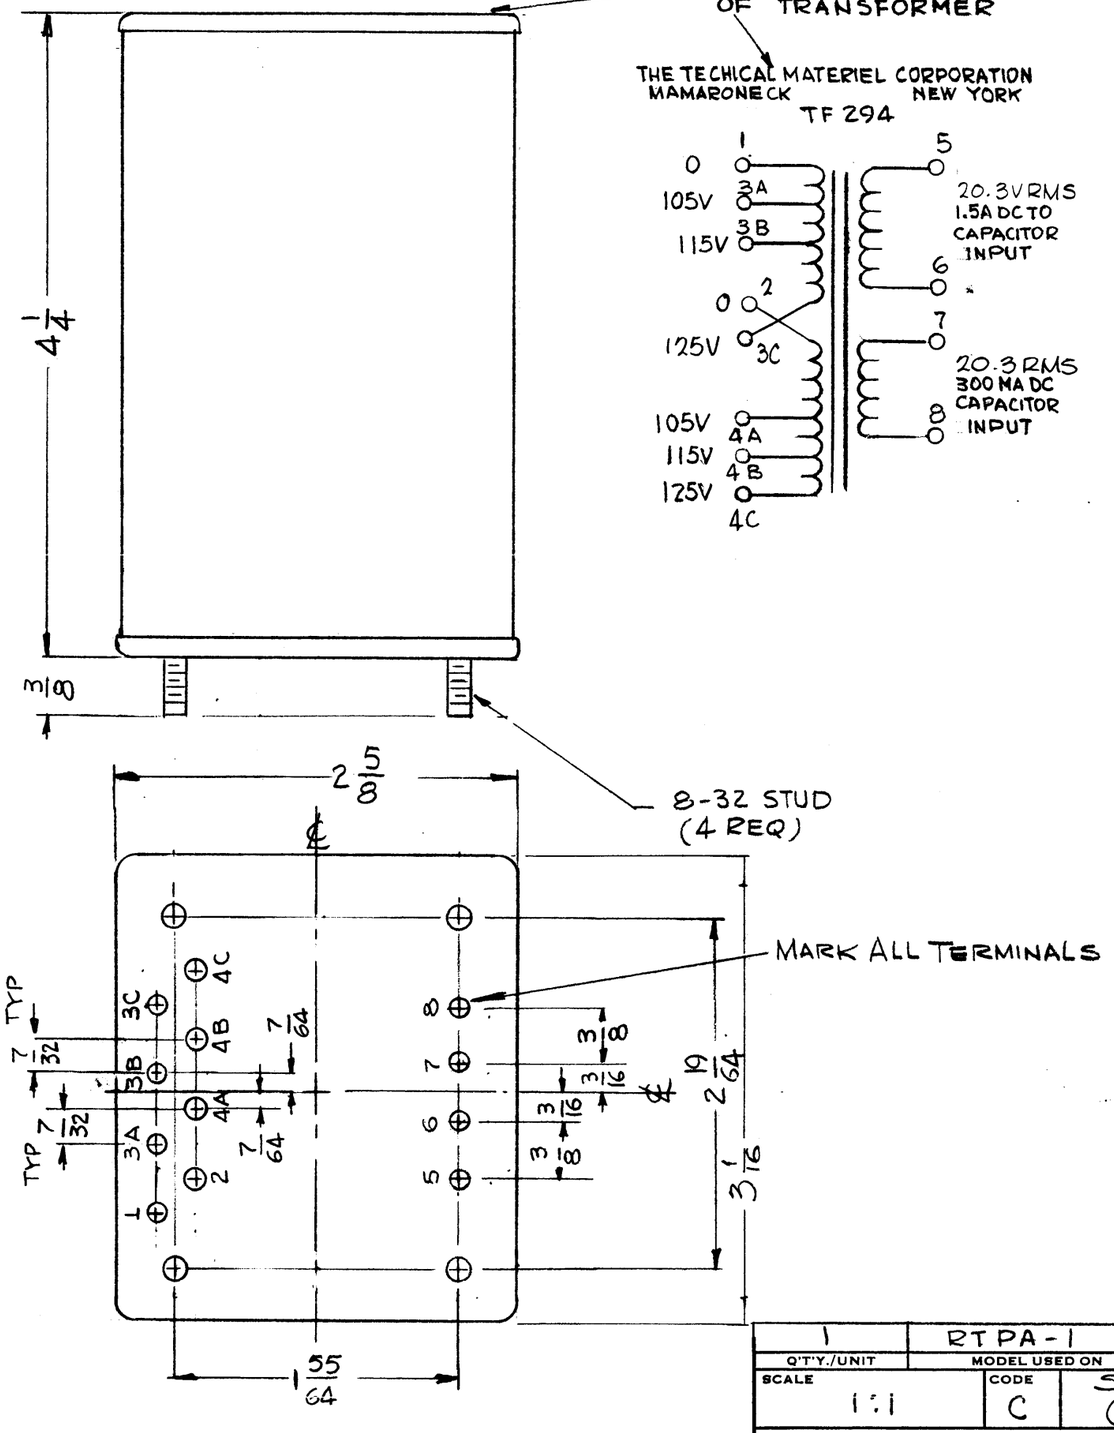


## NOTES

| REVISIONS | | | | | | |
|---|---|---|---|---|---|---|
| SYM | DESCRIPTION | DATE | E.M.N. NO. | DRAFT | CHKD | APPD |
| X | EXPERIMENTAL RELEASE | 2·26·65 | — | GDL | J.M | NL |
| Ø | ORIGINAL RELEASE FOR PRODUCTION | 3·11·65 | — | GDL | J.M | |

Ø

TF 294

CASE DATA:
- A. HERMETICALLY SEALED
- B. FULLY ENCLOSED
- C. GRAY
- D. MATERIAL: STEEL HOT TIN DIPPED

PRIMARY WINDINGS:
- A. 105, 115, 125V
- B. 50/60 CPS
- C. 1

SECONDARY WINDING
- A. 20.3V RMS; 20.3V RMS
- B. 1.5A DC, 300 MADC

TERMINAL DATA:
- A. QUANTITY 12
- B. SOLDER LUG

MARKING: SCHEMATIC TO BE STAMPED IN BLACK, LETTERING GOTHIC AS PER TMC SPEC. S-727 LOCATED AS SHOWN.

| REQ'D. | ITEM | PART NUMBER | DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| EATON | | LIST OF MATERIAL | | |

| | |
|---|---|
| MATERIAL: See Spec | THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK |
| FINISH: See Spec | TITLE: TRANSFORMER, POWER |

| Q'TY./UNIT | MODEL USED ON | ASS'Y. NO. |
|---|---|---|
| 1 | RT PA-1 | |
| SCALE: 1:1 | CODE: C | S401-30 (6241B) |

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES: DECIMALS .X ± .05, .XX ± .01, .XXX ± .005; FRACTIONS ± 1/64; ANGLES ± 0° 30'

| | | | |
|---|---|---|---|
| DRAWN G.D.L. | DATE 2-26-65 | FINAL APPROVAL | DATE 3/23/65 |
| CHECKED J.C.B. | DATE 3/11/65 | | |
| ELECT. DES. | DATE 3/12/65 | TF 294 | Ø |
| MECH. DES. | DATE | SHEET | REV. LTR. |

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.