TF-5000 B

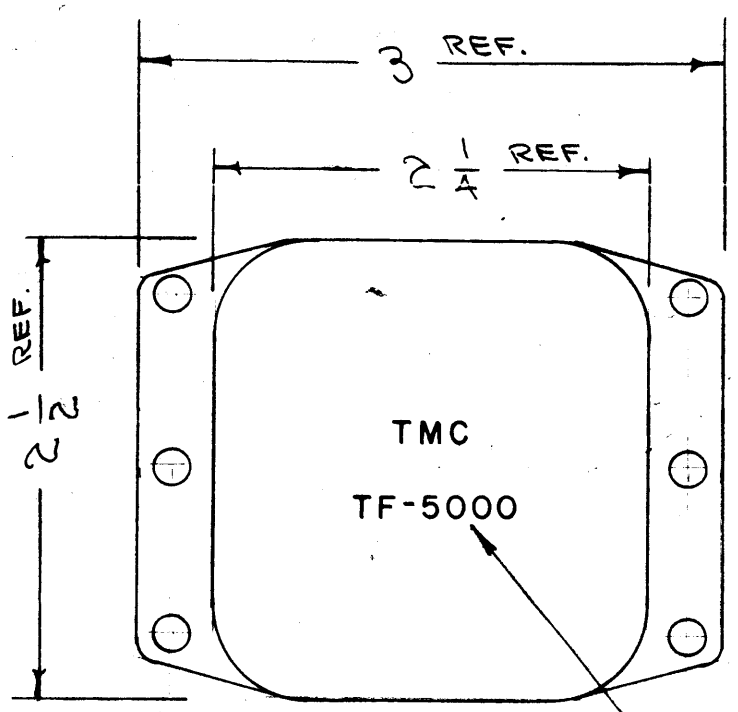

1/8" HIGH METAL STAMP AS SHOWN

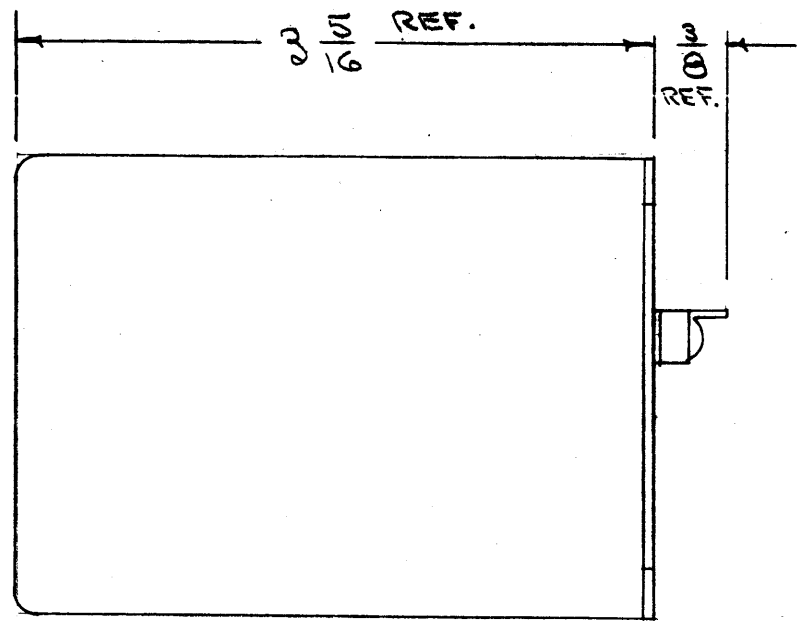

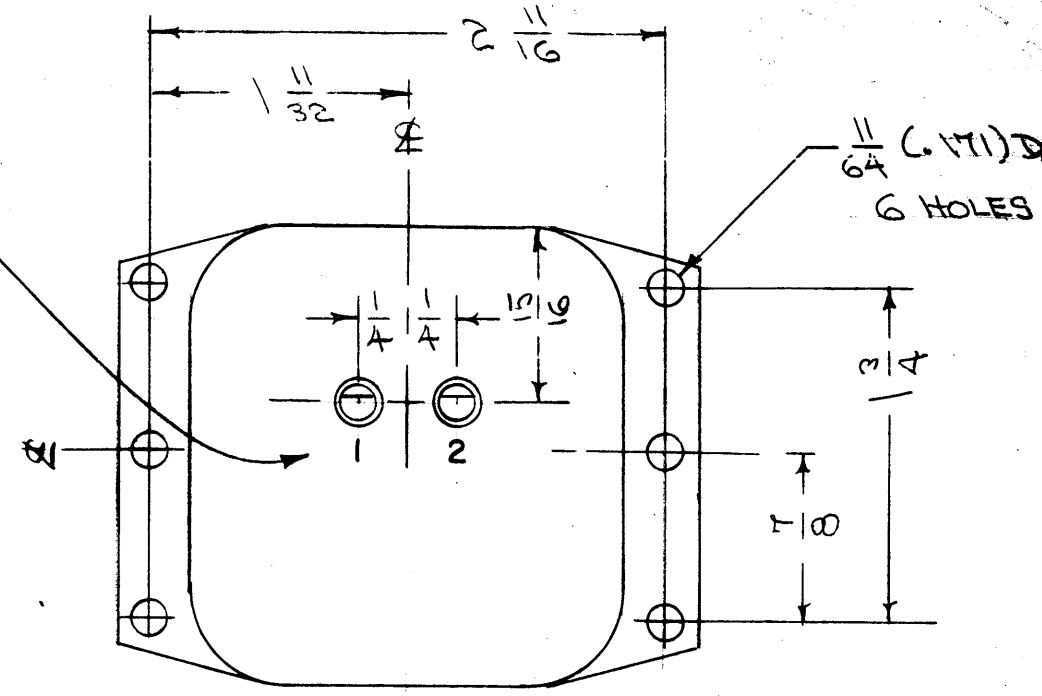

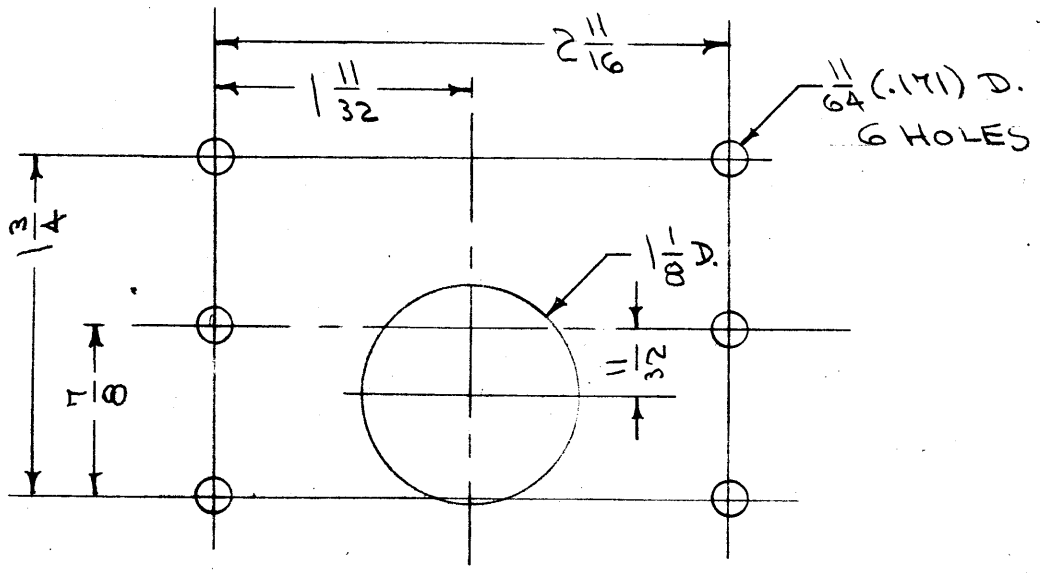

CHASSIS DRILLING PLAN

MECHANICAL SPECIFICATIONS:
CASE – STEEL, HERMETICALLY SEALED
COLOR – T. M. C. GRAY (S-115) EXCEPT TERMINAL END.
FILLER – COMPOUND

ELECTRICAL SPECIFICATIONS:
TERMINALS – SOLDER TYPE, INSULATED
INDUCTANCE – 15 HENRIES
MAX. CURRENT DC – 85 MA
DC RESISTANCE – 285 OHMS
INSULATION TEST VOLTS RMS – 2500

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B		1/8 BLACK GOTHIC STAMP WAS 1/8 METAL STAMP	3-14-58	537	RC		
A	1	INFO. ADDED	11-19-56	1	CDD		AIT
	2	REDRAWN					

TOLERANCES
DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE:
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

RE. PER UNIT	MODEL	PROJECT NO.	ASS'Y. N.	DATE
1	CFA	136		8-4-52
1	PST	137		8-4-52
1	DCU			8-4-52
1	DVM			8-4-52
1	FFR	104	A-121	8-4-52

USED ON

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		MATERIAL	INDUCTOR	
TYPE & TEMPER		HEAT TREAT. SPEC.	CDD 11-19-56 DRAWN	A.T.J. FINAL APP.
FINISH & SPEC. NO.			ELEC. DES. APP. MECH. DES. APP.	TF-5000