
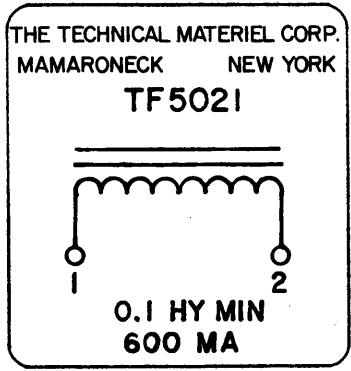


STANDARD DRAWING

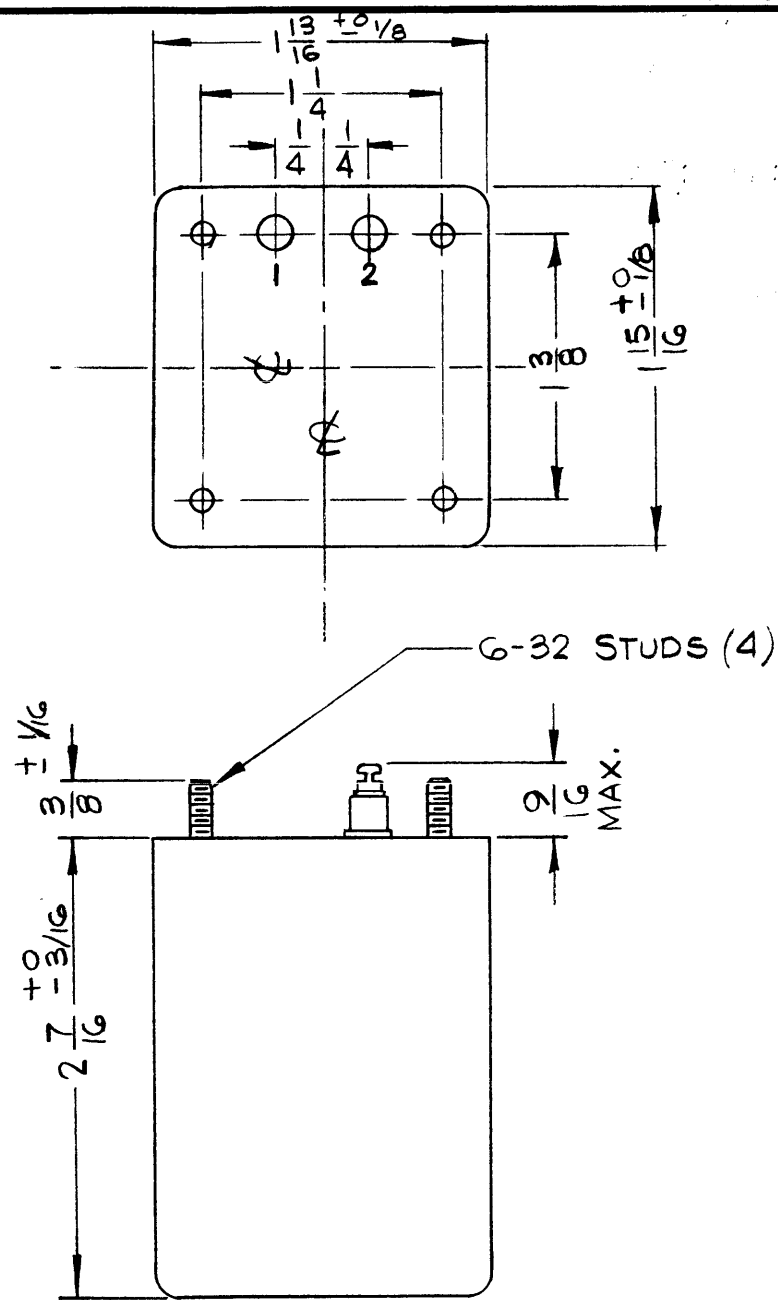

NOTES

Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	S401-30(5494B)
—A—	C	
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.		

TF5021

REVISIONS					
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
Ø	ORIGINAL RELEASE FOR PRODUCTION	5/17/66		C.V.	J.C.

SPECIFICATIONS

ELECTRICAL:

INDUCTANCE: 0.1 HY MIN
 DC CURRENT RATING: 600 MA
 DC RESISTANCE: 2.5 Ω NOMINAL
 INSULATION TEST VOLTAGE: 500 VOLTS

MECHANICAL:

CASE: CRS STEEL, HERMETICALLY SEALED
 FINISH: S115 TMC GRAY, (EXCEPT STUD END)
 DIMENSIONS: SHOWN PICTORALLY
 TERMINALS: SOLDER LUG TYPE, CERAMIC STAND OFF
 TOLERANCE: ±1/32 UNLESS OTHERWISE SPECIFIED

STAMPING:

TERMINALS SHALL BE METAL STAMPED 1-2 AS SHOWN.
 SCHEMATIC DIAGRAM TO BE PLACED ON END OPPOSITE TERMINAL END, AS SHOWN.
 BLACK GOTHIC LETTERING AND LINE WORK.

NOTE: MANUFACTURED IN ACCORDANCE W/MIL-SPEC T-27-A, EXCEPT THAT MIL SPEC T-27-A SHALL NOT APPEAR ON CASE AND QUALIFICATION TESTING IS NOT REQUIRED.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
EATON LIST OF MATERIAL				
MATERIAL			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
SEE SPECS.				
FINISH			TITLE	
SEE SPECS.			CHOKE, FILTER	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			DRAWN	DATE
			H.AUSTIN	3-18-66
			CHECKED	DATE
			J.C.	3/25/66
			ELECT. DES.	DATE
			J.C.	5/17/66
			MECH. DES.	DATE
			J.C.	5/17/66
			FINAL APPROVAL	DATE
			J.C.	5/16/66
			TF5021	Ø
			SHEET	REV. LTR.