


**STANDARD DRAWING**

REVISIONS					
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
X1	36 OHMS ADDED TO DC RES NOM.	10/4/65	A	JC	
Ø	ORIGINAL RELEASE FOR PROD	10/26/65			

TF5022

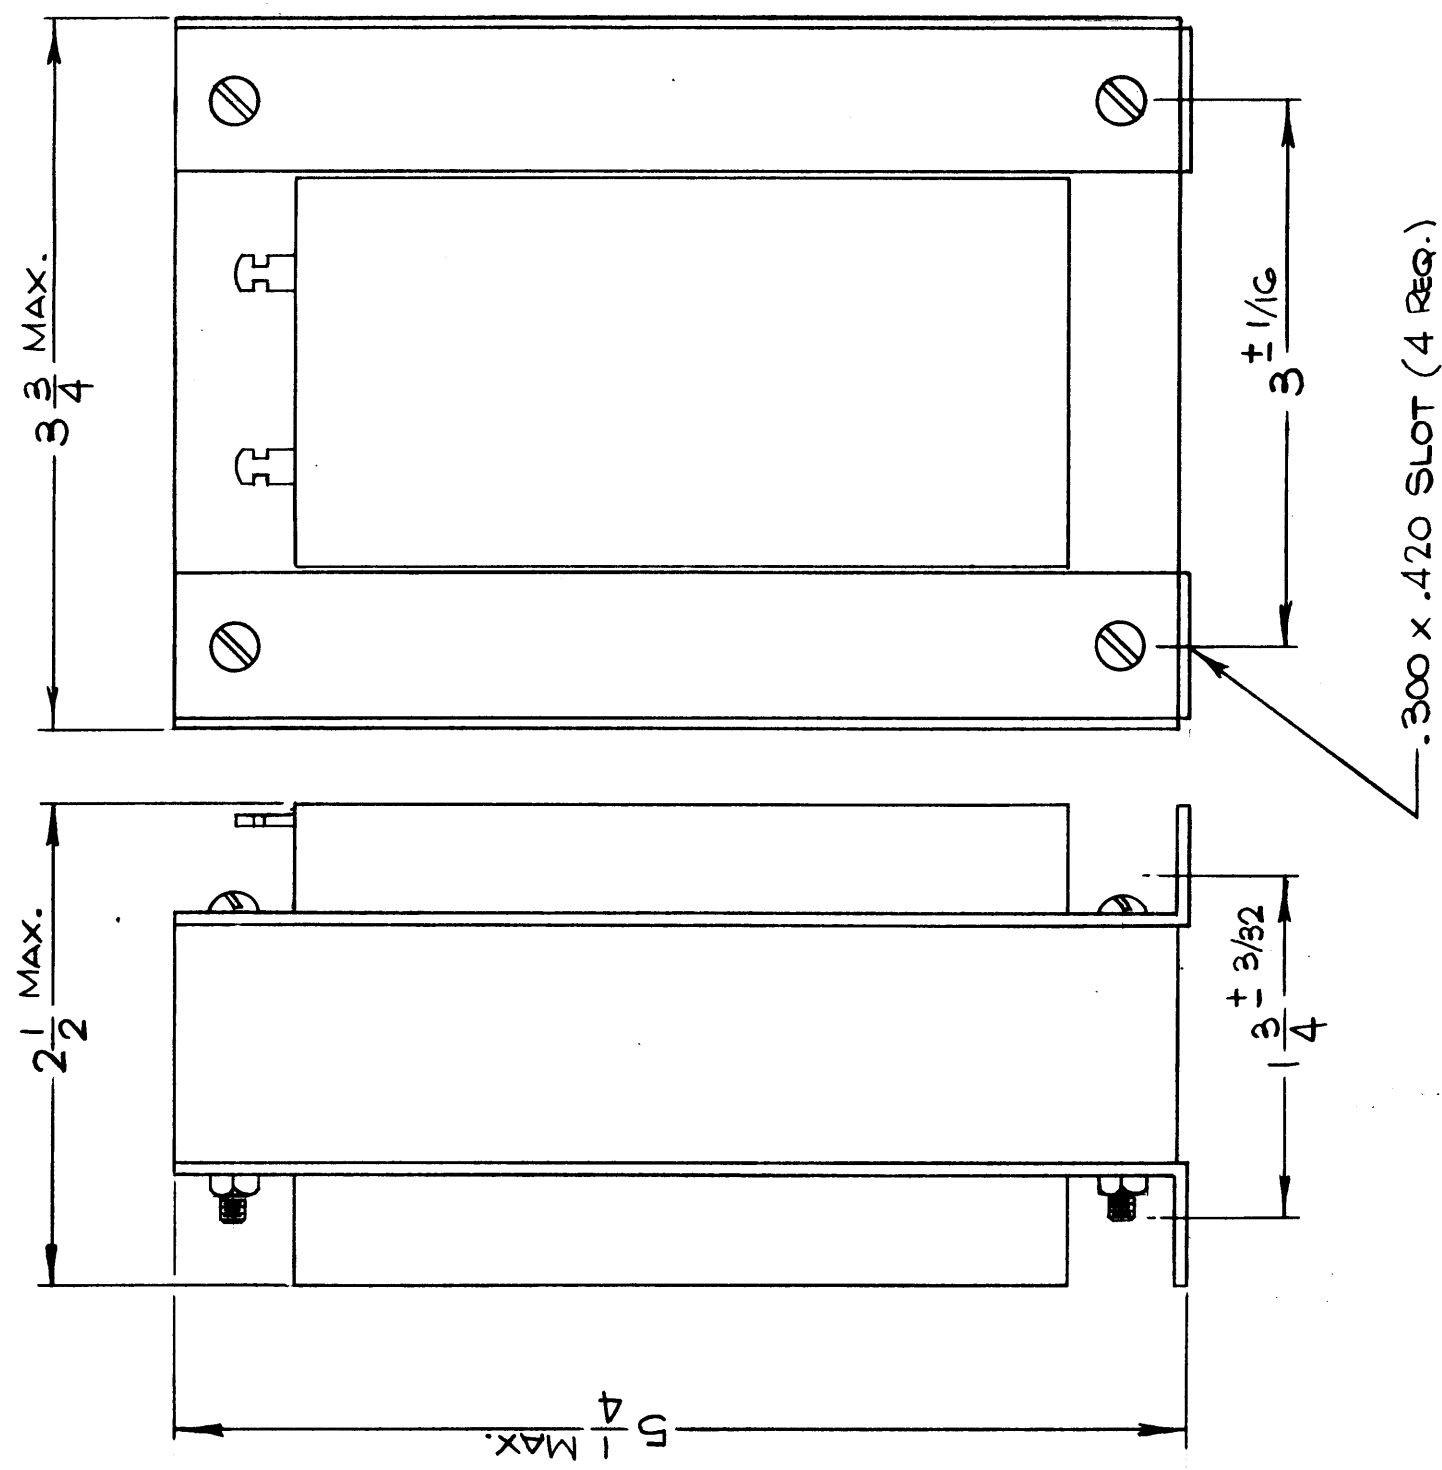

**SPECIFICATIONS**

INDUCTANCE: 2 HY  
 MAXIMUM DC CURRENT- 600 MADC  
 DC RESISTANCE NOMINAL - 36 OHMS  
 INSULATION TEST VOLTAGE- 8000 VDC  
 WORKING VOLTAGE- 5000 VDC  
 CASE - OPEN FRAME  
 FINISH: S-115 TMC SMOOTH GRAY ENAMEL (EXCEPT TERMINALS)  
 DIMENSIONS: SHOWN PICTORIALY  
 TERMINALS: SOLDER LUG TYPE  
 NOMINAL AMBIENT TEMPERATURE: 50°C  
 MARKING: BLACK GOTHIC LETTERING

**NOTE:** MANUFACTURED IN ACCORDANCE WITH MIL-S-T-27-A, EXCEPT THAT MIL SPEC. T-27-A SHALL NOT APPEAR ON CASE AND QUALIFICATION TESTING IS NOT REQUIRED.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
	BUDETTI		LIST OF MATERIAL	
	MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	FINISH		REACTOR	
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DATE 9/21/65	DATE 10/26/65
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .008		DRAWN H. AUSTIN	DATE 10/5/65
	TOLERANCES ± 1/64 ANGLES ± 0° 30'		CHECKED JCB	DATE 10/26/65
	FRACTI NS ± 1/64 ANGLES ± 0° 30'		ELECT. DES. JCB	DATE 10/26/65
			MECH. DES. JCB	DATE 10/26/65
			M/L JCB	DATE 10/25/65

QTY./UNIT	SCALE	MODEL USED ON	ASSY. NO.
1	1:1	TST(-)2.5K	AP128
		CODE	S401-30(G238)

**NOTES**

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.