

REQ. PER UNIT	USED ON		
	MODEL	ASSY. NO.	DATE
1	DVM-2		6-29-60
1	DVM-4		6-8-62

TR-161 B



SYMBOL	FUNCTION
	100kc XTAL FILTER

SPECIFICATIONS

Q.- SEC. > 115 at 100kc
PRI. > 70

IND.- SEC. 8 1/2 MH. RES. APPROX. 12.5Ω
PRI. 600 MH.

CAPACITANCE SEC. 300 MMF.
PRI. 270 MMF at 400 KC.

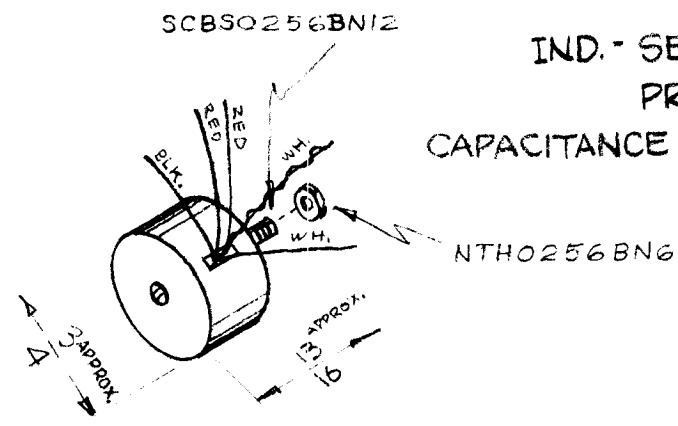

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL		
B	1	BLACK LEADS WERE WHITE ON PICT'L. & SCHEM.	8/31/61	5522	4.A	GAE					THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK TRANSFORMER, RF	B		
A	2	NTH0256BN6 WAS NTH0348BR6	8/21/61	5453	WH	RL								
A	1	SCBS0256BN12 WAS SCBS0308R7												
TOLERANCES			SCALE:		2A-1928			TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES						FINISH & SPEC. NO.		ELEC. DES. APP	MECH. DES. APP	TR-161	B