


THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE FOR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.


REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	TRX-1		2-27-63

TR-178



IMPEDANCE DATA
 INPUT IMPED. = 1650 OHMS CENTER TAPPED.
 OUTPUT IMPED. = 50 OHMS BALANCED.
 OPERATING FREQ. RANGE = 2-40 MC
 FREQ. RESPONSE OVER FREQ. RANGE = ±1.5 db,
 AVERAGE POWER RATING = NOT RATED

CASE DATA
 MATERIAL = EPOXY RESIN
 HERMETICALLY SEALED
 FINISH = NONE

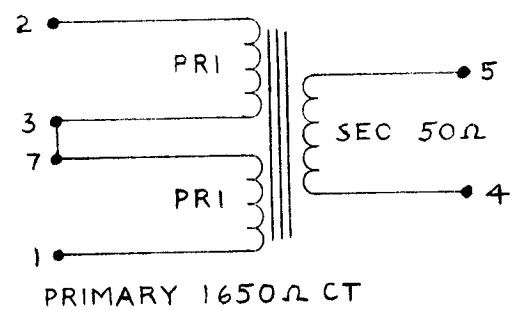

PRIMARY 1650Ω CT

- SCHEMATIC -

REQ.	ITEM	PART NO.	STOCK REF.	DESCRIPTION	SYMBOL						
				THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK							
				TRANSFORMER - RF							
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	NONE								
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	2A-3129							
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
									<i>JMA</i>	<i>JMA</i>	TR-178
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	