

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE FOR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT

12

USED ON

MODEL




VLR-1

ASS'Y. NO.

DATE

6-13-63

TR-182

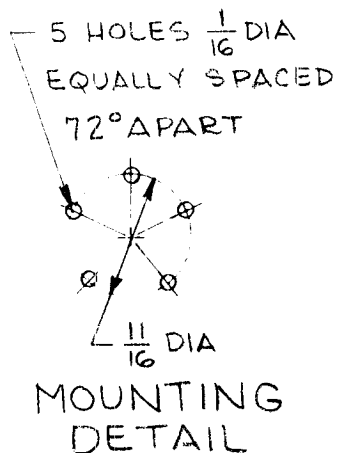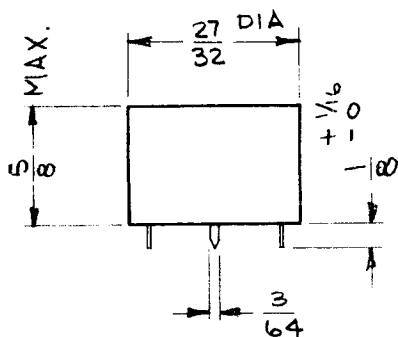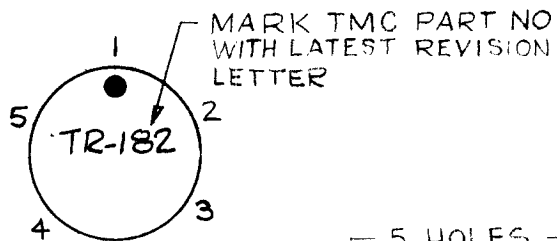

~ TRANSFORMER - R.F. ~

1 ~ IMPEDANCE DATA:

A ~ INPUT IMPEDANCE ~ 2.2K Ω C.T.

B ~ OUTPUT IMPEDANCE ~ 10K Ω

2 ~ OPERATING FREQ. RANGE ~ 5 KC TO 100 KC.

3 ~ FREQ RESPONSE OVER FREQ RANGE ~ ± 1.5 db.

4 ~ AVERAGE POWER RATING ~ NOT RATED.


5 ~ CASE DATA:

A ~ MATERIAL - POTTED PER TMC GL128-6

B ~ HERMETICALLY SEALED

C ~ FINISH - BLUE

6 ~ TERMINALS ~ 5 STAKED P.C. LUGS.

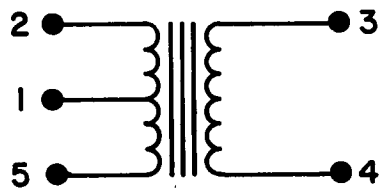

SCHEMATIC DIAGRAM

REQ. ITEM	PART NO.	M. GELLMAN	DESCRIPTION	SYMBOL
	#		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	SEE SPEC 5A		TRANSFORMER, R.F., IMPEDANCE MATCHING (FIXED)	
0	ORIGINAL RELEASE FOR PRODUCTION	6-1-64	A.M. @ MS	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	NONE	
	DECIMALS .X $\pm .05$.XX $\pm .01$.XXX $\pm .005$	FRACTIONS $\pm 1/64$ ANGLES $\pm 0^\circ 30'$	CODE A	4A-3188
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
	SEE SPEC 5C			
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	
				TR-182