


ELECTRICAL SPEC.

INDUCTANCE: 225 μ h, Q=75,
TAP AT 115, Q=50.

CAPACITANCE: 330 μ f, \pm 5%, 500 WVDC

REQ. PER UNIT	USED ON			TF122
	MODEL	ASSY. NO.	DATE	
1	MSR 8	Z3	10-26-60	

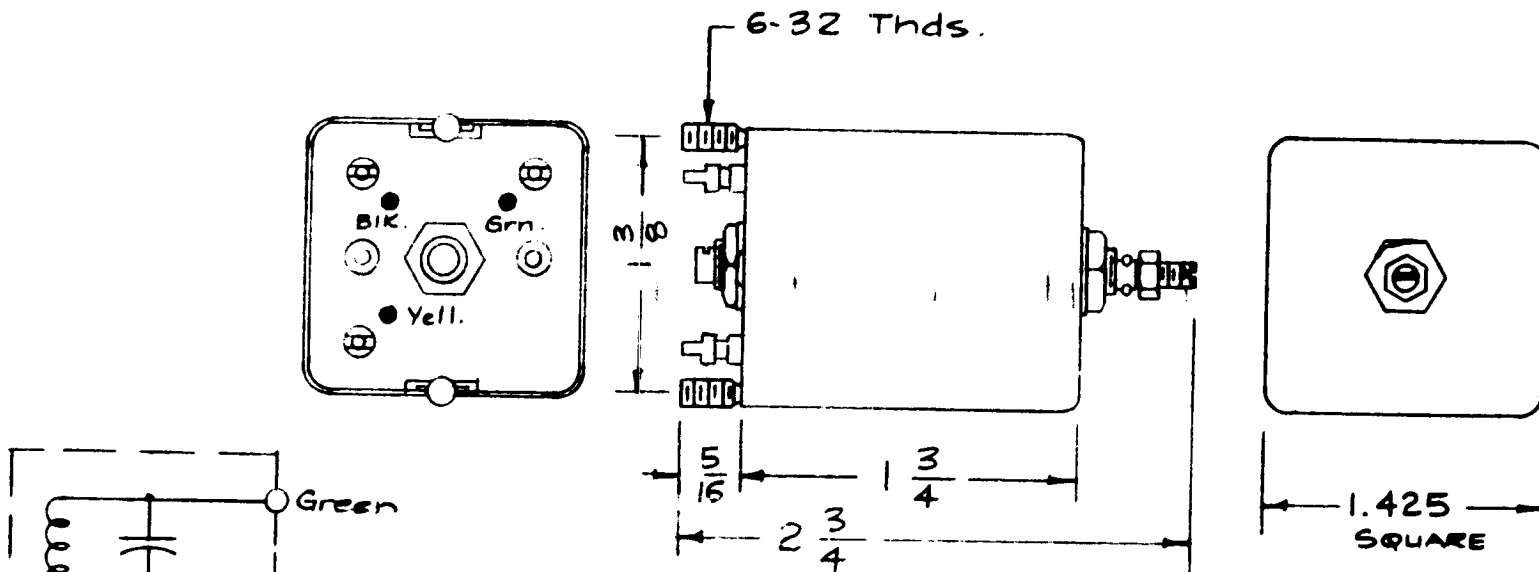

CASE - Aluminum

Dimensions for Ref Only.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
	STOCK SIZE	FIRST OSCILLATOR	
	MATERIAL	TRANSFORMER ASSY, RF	
ISSUE ITEM	CHANGED FROM	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
TOLERANCES		SCALE: FULL	2A-2007
DEC. DIM. \pm	FRAC. DIM. \pm	ANGULAR DIM. \pm	MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES
TYPE & TEMPER. HEAT TREAT. SPEC.		DRAWN	CHECKED
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.
			TF122