

REQ. PER UNIT	USED ON			TT 220	Ø
	MODEL	ASSY. NO.	DATE		
1	VLRB-1	A3661	4-13-65		


ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
INDUCTANCE @ 7.9 MC
PRIMARY: 5.75UH ± .05 UH
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 6.4 MC : > 50

MECHANICAL SPEC.

URNS

PRIMARY: 11 (BIFILAR)
SECONDARY: 1
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 6
MATERIAL:
CORE & SLUG: POWDERED IRON

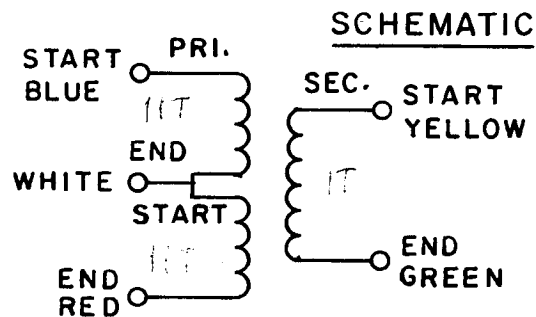

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL				
Ø	ORIGINAL RELEASE FOR PRODUCTION	4/30/65	—	—	—	—	—	—	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	TT 220				
X	EXPER. RELEASE	4/13/65	X	—	—	—	—	—			TRANSFORMER, RF, ADJUSTABLE	Ø		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE		DRAWN		CHECKED		FINAL APPROVAL	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	2-A3873			TYPE & TEMPER		HEAT TREAT. SPEC.		ELEC. DES. APP.		MECH. DES. APP.	