
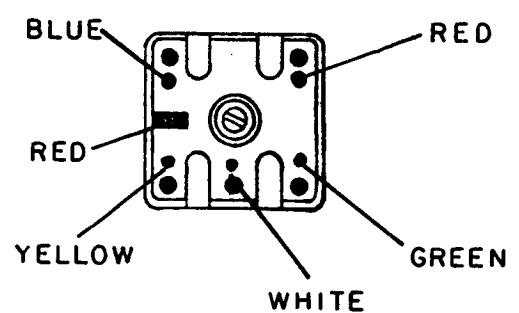



REQ. PER UNIT	USED ON			TT229 \emptyset
	MODEL	ASS'Y. NO.	DATE	
1	VLRB-1	A3655	4-13-65	




**ELECTRICAL SPECS.
(WITH SLUG INSERTED)**

OPERATING FREQUENCY:
 INDUCTANCE @ 7.9 MC
 PRIMARY: 7.96 UH \pm .25 UH
 SECONDARY: NOT RATED
 "Q" (PRIMARY) @ 6 MC : > 30

MECHANICAL SPEC.

TURNS
 PRIMARY: 32
 SECONDARY: 16 (BIFILAR)
 COLOR CODE: RED
 CASE: COPPER CAN
 CASE FINISH: TIN-PLATED
 QUANTITY TERM: 6
 MATERIAL:
 CORE & SLUG: POWDERED IRON

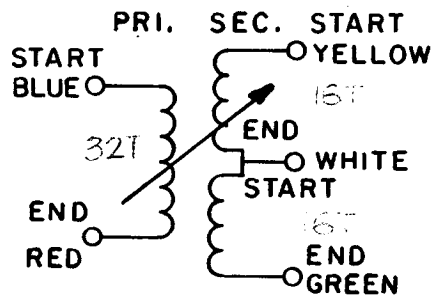

SCHEMATIC

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL								
\emptyset	ORIGINAL RELEASE FOR PRODUCTION	4/13/65	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK									
X	EXPER. RELEASE	4/13/65	TRANSFORMER, RF, ADJUSTABLE									
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		CODE		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.		TT229 \emptyset
DECIMALS X \pm .05 XX \pm .01 XXX \pm .005		FRACTIONS \pm 1/64 ANGLES \pm 0° 30'		A		2-A3903						