

REQ. PER UNIT	USED ON			TT230 \emptyset
	MODEL	ASSY. NO.	DATE	
1	VLRB-1	A3655	4-13-65	


ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
INDUCTANCE @ 7.9 MC
PRIMARY: 7.96 UH \pm .25 UH
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 6 MC : > 50

MECHANICAL SPEC.

TURNS
PRIMARY: 32
SECONDARY: 10
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWDERED IRON

SCHEMATIC

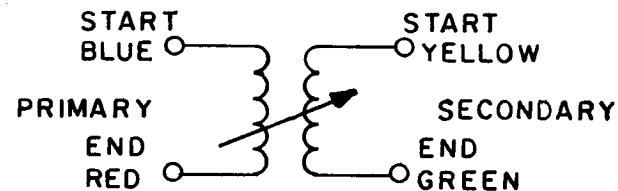

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL	
\emptyset	ORIG. JAL RELEASE FOR PRODUCTION	4/30/65	M				
X	EXPER. RELEASE	4/13/65	X				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE					
DECIMALS	FRACTIONS	CODE	TYPE & TEMPER				HEAT TREAT. SPEC.
.X \pm .05	\pm 1/64	A	2-A3904				
.XX \pm .01	ANGLES						
.XXX \pm .005	\pm 0° 30'						
TOLERANCES		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.	
						TT230 \emptyset	

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TRANSFORMER, RF, ADJUSTABLE

DRAWN: G. Leman
CHECKED: J. B.
FINAL APPROVAL: [Signature]