

REQ. PER UNIT	USED ON			TT231	Ø
	MODEL	ASSY. NO.	DATE		
1	VLRB-1	A 3655	4-13-65		


ELECTRICAL SPECS.  
(WITH SLUG INSERTED)

OPERATING FREQUENCY:  
INDUCTANCE @ 7.9 MC  
PRIMARY: 6.24 UH ± .5UH  
SECONDARY: NOT RATED  
"Q" (PRIMARY) @ 6 MC : > 60

MECHANICAL SPEC.

TURNS  
PRIMARY: 28  
SECONDARY: 5  
COLOR CODE: RED  
CASE: COPPER CAN  
CASE FINISH: TIN-PLATED  
QUANTITY TERM: 4  
MATERIAL:  
CORE & SLUG: POWDERED IRON

SCHEMATIC

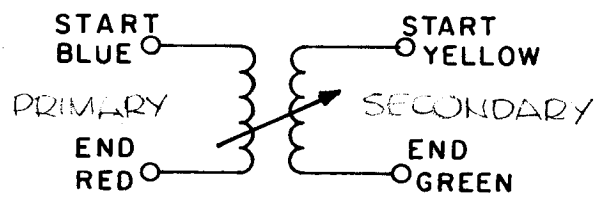

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	4/30/65	M						THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	TRANSFORMER, RF, ADJUSTABLE	
X	EXPER. RELEASE	4/13/65	X								
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	2-A3905							
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	TT231 Ø