
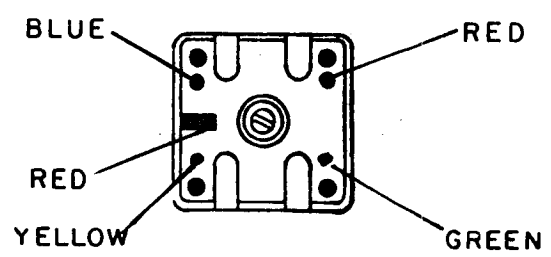



REQ. PER UNIT	USED ON			TT 232 \emptyset
	MODEL	ASSY. NO.	DATE	
1	VLRB-1	A3655	4-13-65	




ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
INDUCTANCE @ 2.5 MC
PRIMARY: 10.1 UH \pm .4 UH
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 6 MC : > 55

MECHANICAL SPEC.

URNS
PRIMARY: 34
SECONDARY: 11
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWDERED IRON

SCHEMATIC

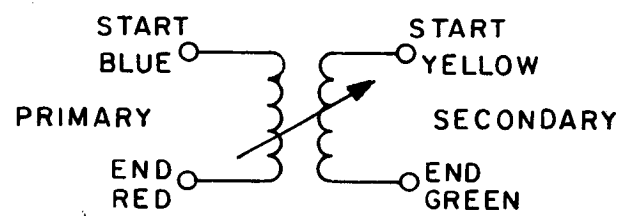

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL		
\emptyset	ORIGINAL RELEASE FOR PRODUCTION	4/30/65	AA						THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	TRANSFORMER, RF, ADJUSTABLE		
X	EXPER. RELEASE	4/13/65	X									
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE										
DECIMALS .X \pm .05 .XX \pm .01 .XXX \pm .005	TOLERANCES	FRACTIONS \pm 1/64 ANGLES \pm 0° 30'	CODE A	2-A3906				TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN G. Leman	CHECKED R/S	FINAL APPROVAL M/M... 5/4/65
								FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	TT 232 \emptyset	