
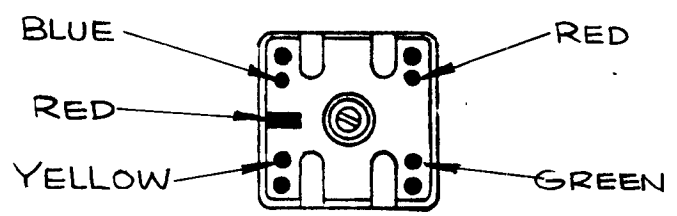



REQ. PER UNIT	USED ON			TT234	Ø
	MODEL	ASS'Y. NO.	DATE		
1	LFSB-1	A3791	3-15-65		




ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
 INDUCTANCE @ 7.9 Mcs
 PRIMARY: $6.5 \mu h \pm .1 \mu h$
 SECONDARY: NOT RATED
 "Q" (PRIMARY) @ 5.25 Mcs: > 115

MECHANICAL SPEC.

URNS
 PRIMARY: 24
 SECONDARY: 7
 COLOR CODE: RED
 CASE: COPPER CAN
 CASE FINISH: TIN-PLATED
 QUANTITY TERM: -4
 MATERIAL:
 CORE & SLUG: POWDERED IRON

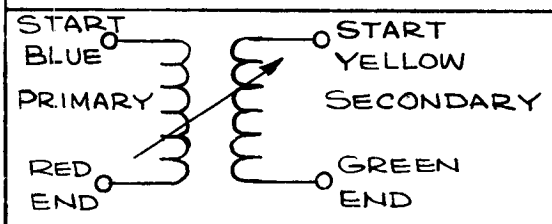

SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL				
Ø	ORIGINAL RELEASE FOR PRODUCTION	4-7-65							THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	Ø				
X	EXPER. RELEASE	3-15-65	X	HLA				TRANSFORMER, RF, ADJUSTABLE						
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE												
	DECIMALS X ± .05 XX ± .01 XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	2-A-3942					H. AUSTIN	3-29-65	Ø			
	TOLERANCES								TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
													TT234	Ø