
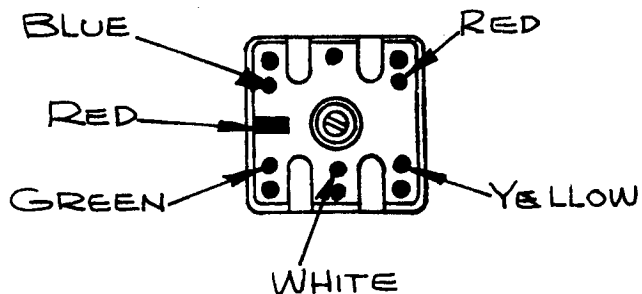



REQ. PER UNIT	USED ON			TT235	Ø
	MODEL	ASS'Y. NO.	DATE		
1	LFSB-1	A3791	3-18-65		




**ELECTRICAL SPECS.
(WITH SLUG INSERTED)**

OPERATING FREQUENCY:
 INDUCTANCE @ 7.9 MC
 PRIMARY: $8.3 \mu h \pm .8 \mu h$
 SECONDARY: NOT RATED
 "Q" (PRIMARY) @ 5.25 MC : > 40

MECHANICAL SPEC.

TURNS
 PRIMARY: 29
 SECONDARY: 58
 COLOR CODE: RED
 CASE: COPPER CAN
 CASE FINISH: TIN-PLATED
 QUANTITY TERM: 6
 MATERIAL:
 CORE & SLUG: POWDERED IRON

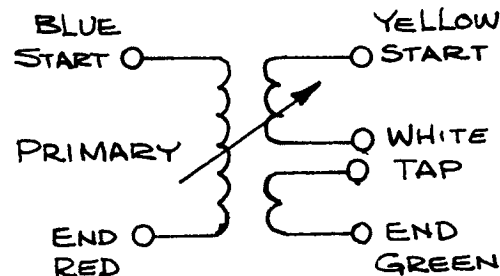

SCHMATIC DIAGRAM

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL	
Ø		—A—	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK					
X		—A—	TRANSFORMER, RF, ADJUSTABLE					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE						
DECIMALS X ± .05 XX ± .01 XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	2-A-3943				
		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		
		FINISH & SPEC. NO.	ELEC. DES. APP.		MECH. DES. APP.		TT235	