
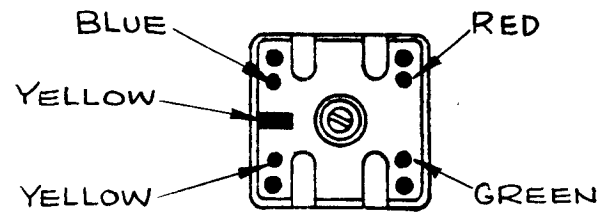



REQ. PER UNIT	USED ON			TT237 $\emptyset$
	MODEL	ASS'Y. NO.	DATE	
1	LFSB-1	A 3791	3-16-65	




**ELECTRICAL SPECS.  
(WITH SLUG INSERTED)**

OPERATING FREQUENCY:  
 INDUCTANCE @ 7.9 MCS  
 PRIMARY: 1.96  $\mu$ h  $\pm$  .05  $\mu$ h  
 SECONDARY: NOT RATED  
 "Q" (PRIMARY) @ 10 MCS : > 105

**MECHANICAL SPEC.**

**TURNS**  
 PRIMARY: 14  
 SECONDARY: 3  
**COLOR CODE: YELLOW**  
 CASE: COPPER CAN  
 CASE FINISH: TIN-PLATED  
 QUANTITY TERM: -4  
 MATERIAL:  
 CORE & SLUG: POWDERED IRON

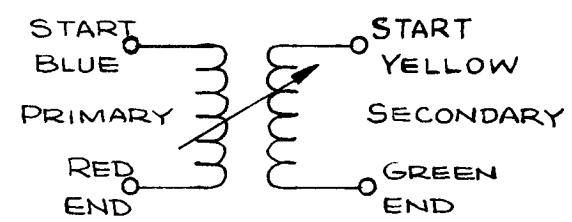

SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL				
	ORIGINAL RELEASE FOR PRODUCTION	4-7-65							THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	$\emptyset$				
X	EXPER. RELEASE	3-16-65	X	HLA				TRANSFORMER, RF, ADJUSTABLE						
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE							H. AUSTIN	3-29-65				
	DECIMALS .X $\pm$ .05 .XX $\pm$ .01 .XXX $\pm$ .005	FRACTIONS $\pm$ 1/64 ANGLES $\pm$ 0° 30'	CODE	2-A-3945						TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
	TOLERANCES		A											TT237 $\emptyset$
										FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	