
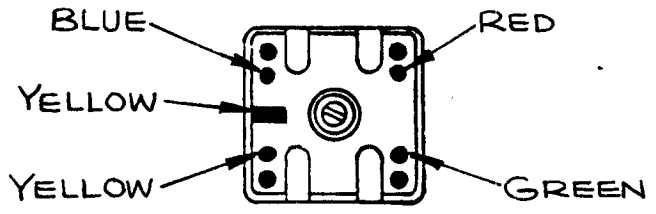
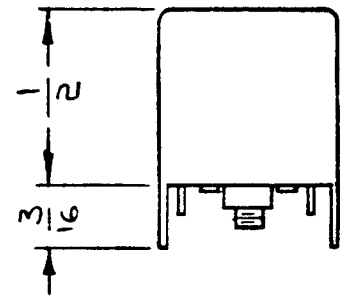


REQ. PER UNIT	USED ON			TT238	Ø
	MODEL	ASS'Y. NO.	DATE		
1	LFSB-1	A3791	3-16-65		




**ELECTRICAL SPECS.
(WITH SLUG INSERTED)**

OPERATING FREQUENCY:
 INDUCTANCE @ 7.9 MCS
 PRIMARY: 2.3 μ h \pm .1 μ h
 SECONDARY: NOT RATED
 "Q" (PRIMARY) @ 10 MCS: > 100

MECHANICAL SPEC.

URNS
 PRIMARY: 16
 SECONDARY: 1
 COLOR CODE: YELLOW
 CASE: COPPER CAN
 CASE FINISH: TIN-PLATED
 QUANTITY TERM: -4
 MATERIAL:
 CORE & SLUG: POWDERED IRON

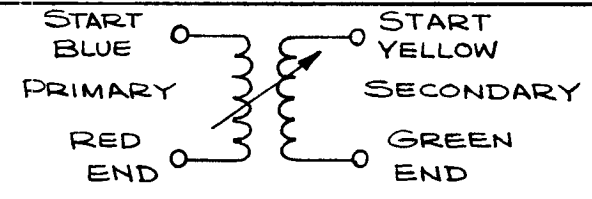

SCHMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL						
Ø	ORIGINAL RELEASE FOR PRODUCTION								THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	TRANSFORMER, RF, ADJUSTABLE						
X	EXPER. RELEASE	3-16-65	X	HLA												
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE							H. AUSTIN	3-21-65	J. C. K...					
DECIMALS .X \pm .05 .XX \pm .01 .XXX \pm .005	TOLERANCES	FRACTIONS \pm 1/64 ANGLES \pm 0° 30'	CODE A	2-A-3946												
									TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	ELEC. DES. APP.	MECH. DES. APP.	TT238	Ø