
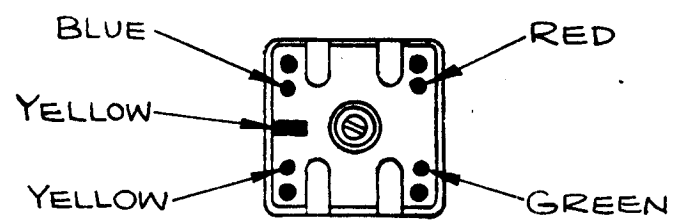
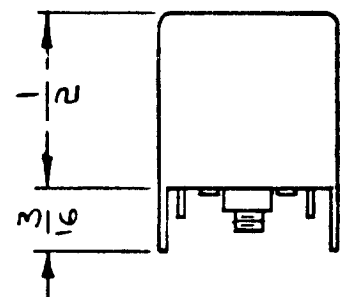


REQ. PER UNIT	USED ON			TT239	Ø
	MODEL	ASS'Y. NO.	DATE		
1	LFSB-1	A3791	3-16-65		




ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
INDUCTANCE @ 7.9 MCS
PRIMARY: $2.35 \mu h \pm .4 \mu h$
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 10 MCS: > 100

MECHANICAL SPEC.

TURNS
PRIMARY: 16
SECONDARY: 5
COLOR CODE: YELLOW
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: -4
MATERIAL:
CORE & SLUG: POWDERED IRON

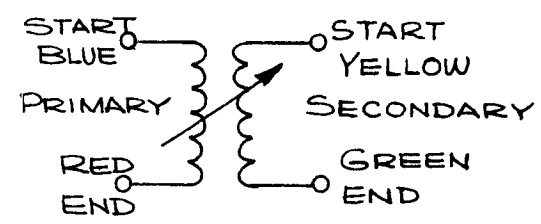

SCHEMATIC DIAGRAM

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
Ø	—	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
X	—	TRANSFORMER, RF, ADJUSTABLE	
SYM	DESCRIPTION	DATE	CH. NO.
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	
DECIMALS X ± .05 XX ± .01 XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A
	2-A-3947		
	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN
	—	—	H. AUSTIN
	FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
	—	—	3-29-65
			TT239