


| | | | | | |
|---------------|---------|------------|---------|-------|---|
| REQ. PER UNIT | USED ON | | | TT240 | Ø |
| | MODEL | ASS'Y. NO. | DATE | | |
| 4 | LFSB-I | A3788 | 3-16-65 | | |

ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
INDUCTANCE: @ 2.5MC
PRIMARY: 26µh ± 1µh
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 1.0 MC: 90 MIN.

MECHANICAL SPEC.

TURNS
PRIMARY: 49
SECONDARY: 9
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWDERED IRON

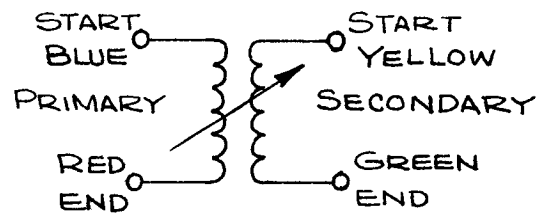

SCHEMATIC DIAGRAM

| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. | REQ. ITEM | PART NO. | DESCRIPTION | SYMBOL | |
|---|---------------------------------|---|-----------|----------|---------|-----------|--------------------|-------------------|--|-----------------|----------------|
| | | | | | | | | | THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK | | |
| | ORIGINAL RELEASE FOR PRODUCTION | A3788 | | | | | | STOCK SIZE | | | |
| X | EXPER. RELEASE | 3-16-65 | X | HLA | | | | | TRANSFORMER, RF, ADJUSTABLE | | |
| | | | | | | | | MATERIAL | | | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES | | | | | | | SCALE | | | | |
| DECIMALS X ± .05 .XX ± .01 .XXX ± .005 | TOLERANCES | FRACTIONS ± 1/64 ANGLES ± 0° 30' | CODE A | 2-A-3948 | | | | | H. AUSTIN | 3-16-65 | |
| | | | | | | | TYPE & TEMPER | HEAT TREAT. SPEC. | DRAWN | CHECKED | FINAL APPROVAL |
| | | | | | | | | | MJB | | TT-240 |
| | | | | | | | FINISH & SPEC. NO. | | ELEC. DES. APP. | MECH. DES. APP. | Ø |