

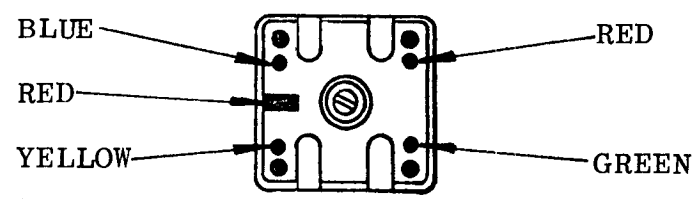



REQ. PER UNIT	USED ON			TT-241	Ø
	MODEL	ASS'Y. NO.	DATE		
2	LFSB-1	A-3788	3-16-65		



ELECTRICAL SPECS.
 (WITH SLUG INSERTED)
 OPERATING FREQUENCY:
 INDUCTANCE @ 2.5MC
 PRIMARY: 26μh ± 1μh
 SECONDARY: NOT RATED
 "Q" (PRIMARY)@3.0MC:105MIN.

MECHANICAL SPECS.
 TURNS:
 PRIMARY: 49
 SECONDARY: 5
 COLOR CODE: RED
 CASE: COPPER CAN
 CASE FINISH: TIN-PLATED
 QUANTITY TERM: 4
 MATERIAL:
 CORE & SLUG: POWDERED IRON

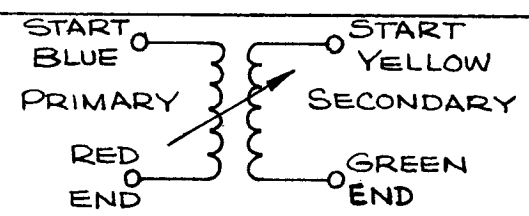

SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	4-7-65							THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	TRANSFORMER, RF, ADJUSTABLE	
X	EXPER. RELEASE	3-16-65	X	HLA							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES, ± 0° 30'		CODE A	2-A-3949		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN H. AUSTINE	CHECKED 3-29-65	FINAL APPROVAL [Signature]
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	TT-241	Ø