


REQ. PER UNIT	USED ON			TT243	Ø
	MODEL	ASS'Y. NO.	DATE		
1	LF5B-1	A3789	3-15-65		

ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
INDUCTANCE @ 7.9 MCS
PRIMARY: $4.9 \mu h \pm .2 \mu h$
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 6.5 MCS: > 110

MECHANICAL SPEC.

TURNS
PRIMARY: 20
SECONDARY: 7
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: -4
MATERIAL:
CORE & SLUG: POWDERED IRON

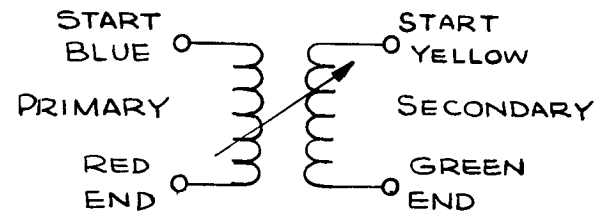

SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL				
Ø	ORIGINAL RELEASE FOR PRODUCTION	4-7-65							THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	Ø				
X	EXPER. RELEASE	3-15-65	X	HLA										
									TRANSFORMER, RF, ADJUSTABLE					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE			H. AUSTIN	3-29-65			
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE	2-A-3951		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		TT243	Ø
TOLERANCES							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.					