

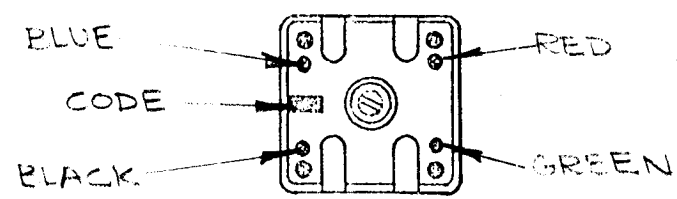



REQ. PER UNIT	USED ON			TT250	A
	MODEL	ASS'Y. NO.	DATE		
4	PFCB-1		10-21-64		



ELECTRICAL SPECS.
(WITH SLUG INSERTED)
OPERATING FREQUENCY:
INDUCTANCE: @ 7.9MC
PRIMARY: 5.5 μ h \pm 5%
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 5MC 80 MIN.

MECHANICAL SPECS.
TURNS
PRIMARY: 24
SECONDARY: 5
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWER IRON

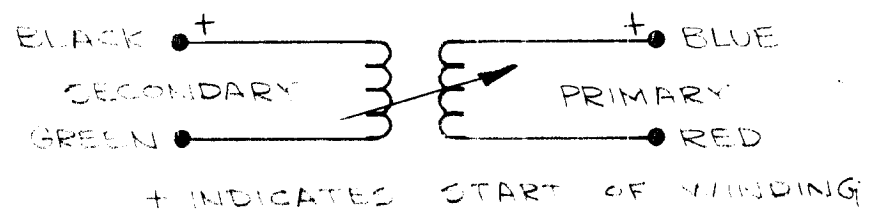

SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENGR. APP.	REQ. ITEM	PART NO.	GELLMAN	DESCRIPTION	SYMBOL	
A	Q PRI. WAS 90 MIN	3-9-67	17921	RVE	<i>[Signature]</i>					THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	TT250 A	
Q	ORIGINAL RELEASE FOR PRODUCTION	4-5-67	44	WU								
X	EXPER. RELEASE	10-21-64	X	<i>[Signature]</i>								
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	2A3066									
DECIMALS XX \pm .05 XXX \pm .01 XXX \pm .005	TOLERANCES	FRAGTIONS \pm 1/64 ANGLES \pm 0° 30'	CODE A					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN <i>[Signature]</i>	CHECKED	FINAL APPROVAL <i>[Signature]</i>
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.			