

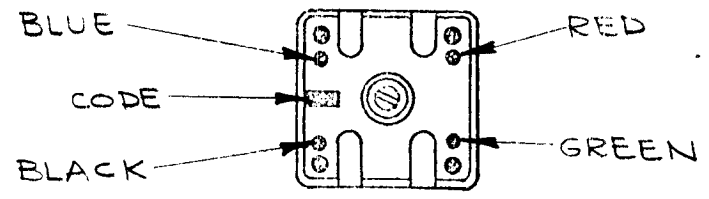



REQ. PER UNIT	USED ON		TT251	
	MODEL	ASS'Y. NO.		
15	PFCB-1		10-21-64	



ELECTRICAL SPECS.
 (WITH SLUG INSERTED)
 OPERATING FREQUENCY: 1 MC
 INDUCTANCE @ 790KC
 PRIMARY: 175μh ±5%
 SECONDARY: NOT RATED
 "Q" (PRIMARY)@1MC: 90 MIN.

MECHANICAL SPEC.
 TURNS
 PRIMARY: 135
 SECONDARY: 15
 COLOR CODE: RED
 CASE: COPPER CAN
 CASE FINISH: TIN-PLATED
 QUANTITY TERM: 4
 MATERIAL:
 CORE & SLUG: POWER IRON

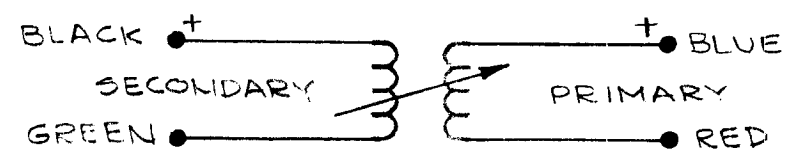

+ INDICATES START OF WINDING
SCHEMATIC DIAGRAM

REQ. ITEM	PART NO.	GELLMAN	DESCRIPTION	SYMBOL								
			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK									
			TRANSFORMER, RF, ADJUSTABLE									
SYMBOL	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
<i>S</i>	ORIGINAL RELEASE	<i>1-</i>								<i>G. L...</i>		<i>[Signature]</i>
<i>X</i>	EXPER. RELEASE	10/21/64	<i>X</i>									<i>[Signature]</i>
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		2A396T								TT251
DECIMALS X ± .05 XX ± .01 XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A									