| REQ. PER UNIT | USED ON MODEL | ASS'Y. NO. | DATE | TT253 |
|---|---|---|---|---|
| 1 | PFCB-1 | | 10-21-64 | |







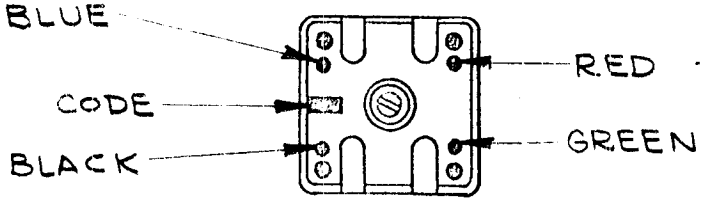


ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY:
INDUCTANCE @ 2.5MC
PRIMARY: 10μh ±5%
SECONDARY: NOT RATED
"Q"(PRIMARY) @3MC:85 MIN

MECHANICAL SPEC.

TURNS
PRIMARY: 30
SECONDARY: 7
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWER IRON

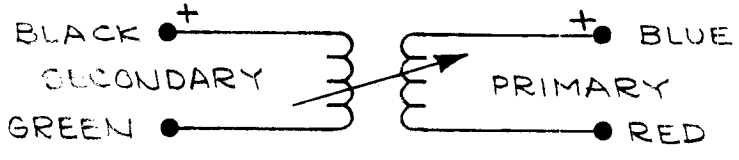


+ INDICATED START OF WINDING
SCHEMATIC DIAGRAM

| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. |
|---|---|---|---|---|---|---|
| | | | | | | |
| | ORIGINAL RELEASE | | | | | |
| X | EXPER. RELEASE | 10-21-64 | X | | | |

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS: .X ±.05, .XX ±.01, .XXX ±.005
FRACTIONS: ± 1/64
ANGLES: ± 0° 30'

SCALE: 2A3969

CODE: A

| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| | | | | |

STOCK SIZE: —

MATERIAL: —

TYPE & TEMPER: — | HEAT TREAT. SPEC.: —

FINISH & SPEC. NO.: —

GELLMAN

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TRANSFORMER, R. F., ADJUSTABLE

DRAWN | CHECKED | FINAL APPROVAL

ELEC. DES. APP. | MECH. DES. APP.

TT253