


REQ. PER UNIT	USED ON		TT256	B
	MODEL	ASSY. NO.		
2	CMRA-1	A4219	5-11-65	

ELECTRICAL SPECS.
(W/O SLUG)

OPERATING FREQUENCY:
INDUCTANCE @ 2.5 MHZ
PRIMARY: 55 μ h \pm 10.0 μ h
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 2.5 MHZ *Mins. 20*

MECHANICAL SPEC.

URNS
PRIMARY: 100
SECONDARY: 50
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWDERED IRON

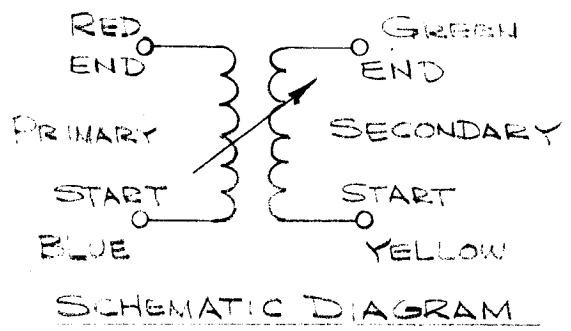

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL	
B	TT256 RELOC.	12.30.65	17586	HLA	<i>QCB</i>	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK TRANSFORMER, RF. ADJ. OA-T1, OA-T2	TT256 B	
A	ELEC. SPECS. REVISION	7-28-64	16513	KYE	<i>[Signature]</i>			
Ø	ORIG. RELEASE	5-11-65	Ø	HLA				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE						
DECIMALS X \pm .05 XX \pm .01 XXX \pm .005	TOLERANCES	FRACTIONS \pm 1/64 ANGLES \pm 0° 30'	CODE A	2A42G9				
TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL
FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.				