


REQ. PER UNIT	USED ON			TT261	B
	MODEL	ASSY. NO.	DATE		
4	CMRA-1	A4220	5-11-65		

ELECTRICAL SPECS.
(W/O SLUG)
OPERATING FREQUENCY:
INDUCTANCE @ 1.75 Mc
PRIMARY: $9.5 \mu h \pm 1.0 \mu h$
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 1.75 MC MIN. 15

MECHANICAL SPEC.

URNS
PRIMARY: 70
SECONDARY: 30
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM:
MATERIAL:
CORE & SLUG: POWDERED IRON

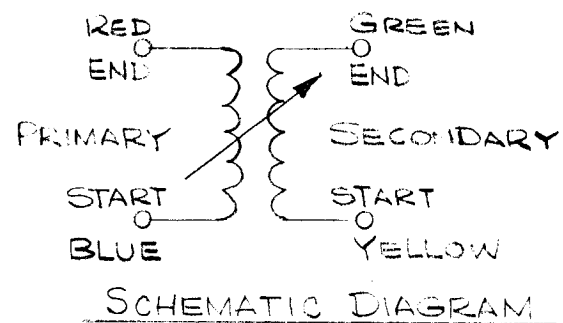

B	CHG. TO PREVIOUS STAMP	8/31/72	20562	GE	A	A	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
A	PRINTING TOL. WAS 0.015 & MIN. WAS 0.03	7							THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
Ø	ORIGINAL RELEASE FOR PRODUCTION	5-11-65	X	026					TRANSFORMER RF, ADJ.		
X	EXPER. RELEASE	5-11-65	X	4A					IF - TG		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE									
DECIMALS X ± .05 XX ± .01 XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES, ± 0° 30'	CODE A	2A427A							
		TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN	CHECKED	FINAL APPROVAL			
								TT261 B			